



MOLDED TEST ACCESSORIES


GENERAL
CATALOG
10-65



POMONA ELECTRONICS



- PATCH CORDS
- CABLE ASSEMBLIES
- SOCKET SAVERS
- TEST SOCKET ADAPTERS
- MOLDED TEST PLUGS
- 3/4" AND 1/2" DOUBLE PLUG ACCESSORIES

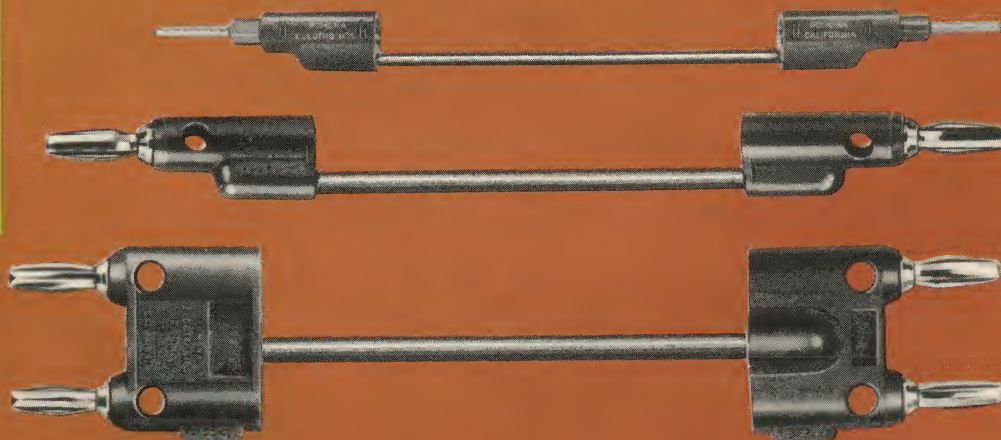

POMONA *Electronics* CO., INC.

1500 EAST NINTH STREET • POMONA, CALIFORNIA M A N U F A C T U R E D I N U . S . A .

POMONA *Electronics* CO., INC.

ELECTRONIC TEST ACCESSORIES

AT POMONA ELECTRONICS...


The entrance to Pomona Electronics Company offers a sincere welcome to salesmen and others having a genuine concern in the service and quality of the products manufactured by our organization. Pomona Electronics customers are welcome to visit us any time.



POMONA TEST ACCESSORIES... Designed to Meet Rigid Industrial and Military Applications

POMONA ELECTRONICS' Test Accessories are primed with uses for all manufacturers and laboratories engaged in testing or designing electronic equipment. Specialization in Molded Patch Cords, Cable Assemblies, Test Socket Adapters, $\frac{3}{4}$ " Spaced Molded Accessories, Molded Test Leads and Connecting Leads and other Design Accessories make Pomona Electronics Co., Inc. your best source of Electronic Test Accessories.


Complete engineering facilities are dedicated to a meticulous control of all facets which comprise excellence of product. Every item is the result of choosing the best in materials and planning the processing and assembly to guarantee quality. Adequate supplies are maintained in our stockroom at all times. Our processing and shipping facilities are geared to fast, accurate deliveries to meet your most demanding delivery schedule.

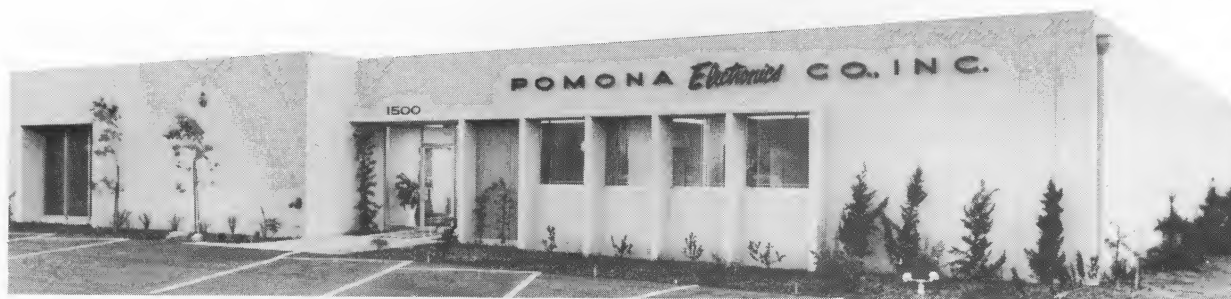

POMONA *Electronics* CO., INC.

1500 E. NINTH ST. • POMONA, CALIFORNIA 91769
TELEPHONE: AREA CODE 714-623-3463


Automatic wire stripping department insures uniformity of product.




Adequate supplies are maintained in our stockroom at all times for fast deliveries.



Management discusses product improvement, and customer relationship.



Experienced workers accept the responsibility for their workmanship.



Engineering facilities are dedicated to a meticulous control of all facets.




TABLE OF CONTENTS

	PAGE		PAGE		PAGE		PAGE
ADAPTER— $\frac{3}{4}$ " Spaced Banana Plugs to:		ADAPTER—Amp Program Board	15	COMPONENT MOUNTING PLUG —Banana $\frac{3}{4}$ " Spaced with:		PLUGS, BANANA— $\frac{3}{4}$ " Spaced Banana Plugs with:	
Binding Posts	5	ADAPTER—Banana Plug to Tip Jack	9	Set Screws—Solderless	4	Set Screws—Solderless	4
BNC Connector	6			Solder Terminals	4	Solder Terminals	4
BNC with Blocking Capacitor	6	ADAPTER—Binding Post to UHF Male	8	COMPONENT MOUNTING BOXES		Shield	8
BNC with Matching Pad	6			With No Connections	12	Shielded Balanced Line	8
Microdot Connector	5	ADAPTER—Phone Tip to Banana Jack	9	With Banana Plugs	12, 13	PLUGS, PHONE TIPS— $\frac{3}{4}$ " Spaced with:	
"N" Connector	7			With Coaxial Connectors	12	Set Screws—Solderless	9
Phone Tip Receptacle	5	ALLIGATOR CLIP, INSULATED, to:		CONNECTING LEADS, with:		Solder Terminals	9
TNC Connector	7	Banana Jack	15	Alligator Clips	14, 18	PLUG, BANANA with:	
UHF Connector	8	Pin Tip Jack	15	Banana Plugs	14, 16, 17, 18	Set Screw—Solderless	9
ADAPTER— $\frac{3}{4}$ " Spaced Shielded Banana Plugs to:		BANANA JACK, ASSEMBLY	15	Miniature Banana Plugs	11	RESISTORS—Molded with $\frac{1}{2}$ " Spaced Banana Plugs	11
BNC Connector	6	BREADBOARD SOCKETS	25	Minigator Clips	18	RESISTORS—Molded, with $\frac{3}{4}$ " Spaced Banana Plugs	5
Microdot Connector	5	CABLE ASSEMBLIES—Coaxial, with:		Phone Tips	14, 17, 18	SHORTING BAR—with $\frac{1}{2}$ " Spaced Banana Plugs	11
"N" Connector	7	Alligator Clips	24	Spade Lugs, Brass	18	SHORTING BAR—with $\frac{3}{4}$ " Spaced Banana Plugs	5
TNC Connector	7	BNC Connector	22, 23, 24	Spade Lugs, Tellurium Copper	19	SHORTING BAR—with $\frac{3}{4}$ " Spaced Phone Tips	9
UHF Connector	8	$\frac{1}{2}$ " Spaced Double Banana Plugs	11	Test Probes	20	SOCKETS, BREADBOARD	25
ADAPTER— $\frac{3}{4}$ " Spaced Binding Posts to:		$\frac{3}{4}$ " Spaced Double Banana Plugs	21, 22, 23, 24	ISOLATION PLUG, with:		SOCKET SAVERS	26
Banana Plugs	5	GR-874 Connector	23	BNC Connector	10	SPADE LUG	11
BNC Connector	6	Minigator Clips	24	Double Banana Plug	10	SPLICE—	
"N" Connector	7	"N" Connector	23, 24	Single Banana Plug	10	Single Banana Plug	9
Phone Plug	5	Pin Tips	23	Single Phone Tip Plug	10	Double Banana Plug	9, 15
TNC Connector	7	PJ-068	23	JACK, BANANA—STANDARD	15	TEST PROBES	14, 20
UHF Connector	8	Shielded Double Banana Plug	14, 21, 22, 24	JACK, BANANA—MINIATURE		TEST SOCKET CATHODE RAY TUBE ADAPTERS	27
ADAPTER— $\frac{3}{4}$ " Spaced Banana Jacks to:		Spade Lugs, Tellurium Copper	19	Single	11	TEST SOCKET TUBE ADAPTERS	25
Phone Plug	5	Test Probe	20	Double	11	TRANSISTOR SOCKET ADAPTER AND ACCESSORIES	15
ADAPTER— $\frac{3}{4}$ " Spaced Shielded Banana Jacks to:		TNC Connector	23	JUMPERS, (see Connecting Leads)		UNIVERSAL HARNESS TESTING ADAPTER	27
BNC	6	UHF Connector	22, 24	PATCH CORDS, (see Connecting Leads) (see Cable Assemblies)			
ADAPTERS		CATHODE RAY TUBE ADAPTERS	27	PLUGS, Banana— $\frac{1}{2}$ " Spaced Banana Plugs with:			
Cathode Ray Tube	27			Set Screws—Solderless	11		
Cathode Ray Tube Conversion	27			Solder Terminals	11		
Test Socket Tube	25						
Universal Harness Testing	27						

ALPHABETICAL-NUMERICAL INDEX

MODEL	PAGE	MODEL	PAGE	MODEL	PAGE	MODEL	PAGE	MODEL	PAGE	MODEL	PAGE
AL-B	18	TVS-7	25	1167	21	1555-B	22	1792	8	1988	20
AL-B-BNC	24	TVS-8	25	1224 (replaced by 2224)		1555-C	22	1796	7	1989	18
AL-B-UHF	24	TVS-9	25	NEW 18		1556-B	24	1808-C	NEW 23	1990	17
AL-C-BNC	24	TVS-12	25	1269	6	1556-C	24	1809	9	1991	15
AL-C-UHF	24	TVS-789	25	1270	6	1569-B	20	1823	9	1992	7
B	16	UHF-B	24	1275	5	1575	5	1825	9	2035	NEW 11
BNC-B	22	UHF-C	24	1276	5	1581	15	1829	9	2095	NEW 13
BNC-C	22	XS-7	25	1277	5	1589	20	1837	10	2096	NEW 12
HB	16	XS-8	25	1279	5	1613	NEW 18	1845	5	2097	NEW 13
MDP	4	XS-9	25	1285	5	1614	15	1847	26	2098	NEW 12
MDP-R	5	2BA	21	1286	5	1645	6	1848	26	2099	NEW 13
MDP-S	5	2BA-AL	24	1296	6	1656	6	1849	26	2100	NEW 13
MDP-ST	4	2BA-MG	24	1325	9	1658	24	1855	5	2101	NEW 13
MDP-X	10	2BB	21	1330	4	1681	6	1858	9	2102	NEW 13
MG-B	18	2BB-AL	24	1330-ST	4	1693	19	1868	6	2103	NEW 12
MG-B-BNC	24	2BB-BNC	22	1340	7	1698	8	1894	NEW 14	2104	NEW 12
MG-B-UHF	24	2BB-MG	24	1366-C	NEW 23	1699	8	1904	9	2105	NEW 12
MG-C-BNC	24	2BB-UHF	24	1367-B	22	1703-C	NEW 23	1910	10	2142	NEW 11
MG-C-UHF	24	2BC	21	1367-C	22	1705	20	1921	8	2143	NEW 11
P	17	2BC-AL	24	1368	21	1707	8	1922	9	2174	NEW 23
PM-080	17	2BC-BNC	22	1383-B	22	1708	8	1944-C	NEW 23	2184-A	NEW 23
PT-063	17	2BC-MG	24	1383-C	22	1710	25	1958	14	2204-C	NEW 14
PT-080	17	2BC-PP	NEW 23	1390	10	1727	17	1959	14	2223-C	NEW 23
SS-7	26	2BC-UHF	24	1432	9	1730	9	1860	18	2224	NEW 12
SS-8	26	110-E	27	1433	8	1737	27	1975	7	Replaces 1224	
SS-9	26	110-G	27	1437	NEW 15	1738	27	1976	7	2239	NEW 14
SS-11	26	110-P	27	1440	16	1739	27	1977	15	2240	NEW 15
SS-12	26	110-R	27	1447	25	1740	7	1978	15	2241-C	NEW 23
SS-789	26	110-RS	27	1449	25	1743	18	1980	5	2243-C	NEW 23
TS-187	15	110-S	27	1452	6	1748	NEW 14	1981	7	2244	NEW 11
TS-187R	15	110-SYR	NEW 27	1468	10	1751	26	1982	7	2245	NEW 11
TVS-1	27	1081	11	1469	10	1756	19	1983	7	2246	NEW 11
TVS-2	27	1126	17	1472	15	1770	7	1985	16	2247-K	NEW 11
TVS-3	27	1155-B	22	1550-B	21	1779	NEW 25	1986	20	2248-K	NEW 11
TVS-4	27	1155-C	22	1550-C	21	1791	8	1987	18	2249-C	NEW 22

Pomona Banana Plug and stack-up accessories are of the highest quality—tough thermo-plastic—molded directly on to the metal body of plugs and connectors for maximum strength, moisture resistance and insulative properties:

General Specifications listed below apply to items using banana plugs in this catalog.


FEATURES . . .

- One piece beryllium copper heat treated spring for maximum long life.
- Rounded spring design results in maximum contact area.
- STACK-UP feature allows an unlimited number of connections at the same electrical point.

SPECIFICATIONS . . .

- Fits standard 0.166 dia. banana jacks.
- Spring, beryllium copper alloy 25 per QQ-C-533.
- Plug body, Brass per QQ-B-626 Comp. 22.
- Nickel plated per QQ-N-290, Class 2.
- Contact resistance less than 0.001 ohms per banana plug

ACTUAL SIZE


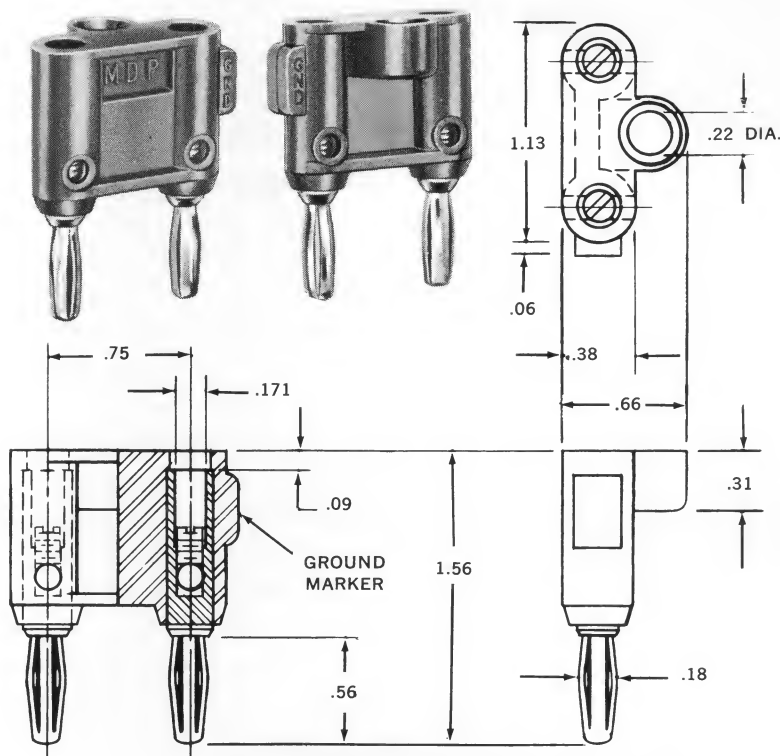


RATINGS

Models: MDP; MDP-ST; 1330; 1330-ST

Capacity :	0.8 pf to 10 MC
Current :	15 Amps. Cont., 30 Amps. Int.
Voltage :	5000 W.V. D.C.
Temperature :	-25°C to +85°C, operating temp.

DOUBLE BANANA PLUG





Double banana plug on 3/4" centers; set screws secure leads; simplifies cable construction or component mounting; banana jacks permit top Stack-Up for multiple connections.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL MDP (Specify Color)

NET .75

COMPONENT MOUNTING DOUBLE BANANA PLUG





Double banana plug on 3/4" centers; set screws secure leads; features recess for mounting small components; banana jacks permit top Stack-Up for multiple connections.

COLORS: Black, Red

MODEL 1330 (Specify Color)

NET .75

DOUBLE BANANA PLUG WITH SOLDER TURRET TERMINALS





Similar to Model MDP, except has solder turret terminals for permanent noise-free connections of cables and components. Double banana plug on 3/4" centers; banana jacks permit top Stack-Up for multiple connections.

COLOR: Black

MODEL MDP-ST

NET .85

COMPONENT PLUG WITH SOLDER TURRET TERMINALS



Similar to Model 1330, except has solder turret terminals for permanent noise-free connections of components, etc. Double banana plug on 3/4" centers; Banana jacks permit top Stack-Up for multiple connections.


COLORS: Black, Red.

MODEL 1330-ST (Specify Color)

NET .85



ADAPTER — BNC RECEPTACLE TO DOUBLE BANANA PLUG



Permits BNC plug to be used with equipment having banana jacks. Excellent for adapting laboratory VTVM, oscilloscopes and signal generator inputs to readily available coaxial cables.


UPPER: BNC receptacle.

LOWER: Double banana plug, on 3/4" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Black.

MODEL 1269

NET 2.85



ADAPTER — BNC PLUG TO DOUBLE BANANA PLUG



Permits BNC receptacle to be used with equipment having banana jacks. Minimizes number of coaxial connections for maximum efficiency.


UPPER: BNC plug.

LOWER: Double banana plug, on 3/4" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Black.

MODEL 1270

NET 3.85



ADAPTER — BINDING POSTS TO BNC PLUG



Permits single or double banana plugs to be used with equipment having BNC receptacle. Excellent for use with laboratory oscilloscopes.


UPPER: Insulated binding posts, on 3/4" centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.

LOWER: BNC plug.


COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1296

NET 4.85



ADAPTER — BINDING POSTS TO BNC RECEPTACLE



Permits single or double banana plugs to be used with equipment having BNC plug.

UPPER: Insulated binding posts, on 3/4" centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.

LOWER: BNC receptacle.

COLOR: Body, Black. Binding Posts: Black/Red.

MODEL 1452

NET 4.85




ADAPTER — BNC RECEPTACLE TO SHIELDED BANANA PLUGS

Permits BNC plug to be used with equipment having banana jack binding posts. Black anodized aluminum shield reduces noise pick-up more than 70 DB. Ideal for low level inputs to oscilloscopes, wave analyzers, etc.

UPPER: BNC receptacle.

LOWER: Shielded double banana plug, on 3/4" centers.



MODEL 1645

NET 3.45




Now! Increase the flexibility of your laboratory with the use of POMONA molded test accessories.

Minimize the necessity of stocking a large quantity and variety of coaxial cables by using POMONA molded adapters.

Tough thermo-plastic material molded to plug body or connectors insures maximum strength, moisture resistance and excellent insulative properties.

POMONA ELECTRONICS adapters are designed and engineered with you in mind, from the selection of the best in materials, incorporated with a quality control program that enables us to offer to you, products that are unequalled in reliability and quality.

Complete engineering facilities are offered to our customers for special adapter problems that may arise.



ADAPTER — SIGNAL ISOLATOR — BNC RECEPTACLE TO DOUBLE BANANA PLUG

Permits BNC male connector to be used with equipment having banana jacks. General purpose ceramic capacitor molded internally. Rated @ .01 mfd $\pm 20\%$, 200 WVDC. Insulation resistance 10,000 megohms min. Ideal for isolating DC signals from VTVM inputs and signal generator outputs.


UPPER: BNC receptacle.

LOWER: Double banana plug, on 3/4" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Blue.

MODEL 1868

NET 7.85



ADAPTER — BNC MATCHING PAD



Adapts 600 OHM sources to 50, 75 or 93 OHM cables. Excellent for matching signal generators and VTVM's to standard coaxial cables. Ideal for receiver alignment. Molded in deposited carbon resistors 1%, 1/4W.

UPPER: BNC receptacle.

LOWER: Double banana plug, on 3/4" centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.

MODEL
1656-1
1656-2
1656-3

COLOR
Yellow
Red
White

RANGE — OHMS
600 to 50
600 to 75
600 to 93

NET
10.85
10.85
10.85




ADAPTER — BNC RECEPTACLE TO SHIELDED BANANA JACKS

Permits BNC plug to be used with equipment having banana plugs. Black anodized aluminum shield reduces noise pick-up more than 70 DB. Ideal for low level inputs to oscilloscopes, wave analyzers, etc.

UPPER: BNC receptacle.


LOWER: Shielded double banana jacks, on 3/4" centers.

COLOR: Black.




MODEL 1681

NET 3.45



MODEL 1340

ADAPTER — TNC RECEPTACLE TO DOUBLE BANANA PLUG




Permits TNC plug to be used with equipment having banana jacks. Perfect for connecting modern control systems to laboratory test equipment.

UPPER: TNC receptacle.

LOWER: Double banana plug, on $\frac{3}{4}$ " centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Black.

NET 5.85



MODEL 1981

ADAPTER — TNC PLUG TO DOUBLE BANANA PLUG




Permits TNC receptacle to be used with equipment having banana jacks. Minimizes your stock of coaxial cables.

UPPER: TNC plug.

LOWER: Double banana plug, on $\frac{3}{4}$ " centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Black.

NET 6.85



MODEL 1982

ADAPTER — BINDING POSTS TO TNC PLUG




Permits single or double banana plugs to be used with equipment having a TNC receptacle. Exceptional for signal insertion with rapid interchangeability of terminations.

UPPER: Insulated binding posts, on $\frac{3}{4}$ " centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.

LOWER: TNC plug.


COLOR: Body, Black. Binding Posts: Black/Red.

NET 6.85



MODEL 1976

ADAPTER — BINDING POSTS TO TNC RECEPTACLE




Permits single or double banana plugs to be used with equipment having TNC plug. Useful for rapid interconnection of systems and components.

UPPER: Insulated binding posts, on $\frac{3}{4}$ " centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.

LOWER: TNC receptacle.


COLOR: Body, Black. Binding Posts: Black/Red.

NET 5.85



MODEL 1975

ADAPTER — TNC RECEPTACLE TO SHIELDED BANANA PLUGS




Permits TNC plug to be used with equipment having banana jack binding posts. Black anodized aluminum shield reduces noise pick-up more than 70 DB.

UPPER: TNC receptacle.

LOWER: Double banana plug, on $\frac{3}{4}$ " centers.


COLOR: Black.

NET 4.85



MODEL 1740

ADAPTER — TYPE "N" RECEPTACLE TO DOUBLE BANANA PLUG




Permits Type "N" plug to be used with equipment having banana jacks. Ideal for connecting R.F. equipment to conventional test equipment.

UPPER: Type "N" receptacle.

LOWER: Double banana plug, on $\frac{3}{4}$ " centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Black.

NET 5.85



MODEL 1770

ADAPTER — TYPE "N" PLUG TO DOUBLE BANANA PLUG




Permits type "N" receptacle to be used with equipment having banana jacks.

UPPER: Type "N" plug.

LOWER: Double banana plug, on $\frac{3}{4}$ " centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Black.

NET 5.85



MODEL 1796

ADAPTER — BINDING POSTS TO TYPE "N" PLUG




Permits single or double banana plugs to be used with equipment having Type "N" receptacle. Binding posts allow component insertion.

UPPER: Insulated binding posts, on $\frac{3}{4}$ " centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.

LOWER: Type "N" plug.


COLOR: Black. Binding Posts: Black/Red.

NET 5.85



MODEL 1992

ADAPTER — BINDING POSTS TO TYPE "N" RECEPTACLE



Permits single or double banana plugs to be used with equipment having type "N" plug. Useful for rapid interconnection of systems and components.

UPPER: Insulated binding posts, on $\frac{3}{4}$ " centers with .166 dia. banana jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.

LOWER: Type "N" receptacle.


COLOR: Body, Black. Binding Posts: Black/Red.

NET 5.85



MODEL 1983

ADAPTER — TYPE "N" RECEPTACLE TO SHIELDED BANANA PLUGS



Permits type "N" plug to be used with equipment having banana jack binding posts. Black anodized aluminum shield reduces noise pick-up more than 70 DB.

UPPER: Type "N" receptacle.


LOWER: Double banana plug, on $\frac{3}{4}$ " centers.

COLOR: Black.



NET 4.85



SHIELDED DOUBLE BANANA PLUG IN-LINE CABLE ENTRY




RATED: 15A CONTINUOUS
1200 WVDC
3400 VDC BREAKDOWN
2.5 PF @ 1 MC




- Shielded double plug $\frac{3}{4}$ " spaced
- Die cast aluminum shell, black anodized
- Noise pick-up reduced 70 DB
- Gold flashed solder turret terminals for positive reliable cable connections
- One piece nickel plated beryllium copper springs for use with standard 0.166 dia. banana jack binding posts.
- Rounded banana spring design results in maximum contact area and minimum contact resistance
- GND clearly molded in shell
- Cable opening, $\frac{7}{32}$ " diameter

MODEL 1433



NET 2.25



SHIELDED DOUBLE BANANA PLUG RIGHT ANGLE CABLE ENTRY



RATED: 15A CONTINUOUS
2800 PEAK WV
5000 VDC BREAKDOWN
2.0 PF @ 1 MC.



- Shielded double plug, $\frac{3}{4}$ " spaced
- Ceramic insulating base
- Die cast aluminum shell, black anodized
- GND clearly molded in shell
- Noise pick-up reduced 70 DB
- One piece nickel plated beryllium copper springs for use with 0.166 diameter banana jack binding posts.
- Rounded banana spring design results in maximum contact area and minimum contact resistance
- Vinyl grommet and nickel plated snap button supplied



MODEL 1791

NET 2.95

BALANCED LINE SHIELDED DOUBLE BANANA PLUG


- Unique 3 terminal design allows connection to shielded two conductor cable while maintaining balanced conditions
- Minimizes ground loop errors in low signal level applications
- Die cast aluminum shell, black anodized
- Noise pick-up reduced at least 70 DB
- Gold flashed solder turret terminals for reliable noise free connections
- One piece nickel plated beryllium copper springs for use with standard 0.166 dia. banana jack binding posts.

RATED:
15A Continuous
1000 WV Peak; line to shield
2000 WV peak; line to line
2500 V peak break-down; line to shield
5000 V peak break-down, line to line
2.0 pf @ 1 MC Capacity; line to line
3.0 pf @ 1 MC. capacity; both lines to shield.

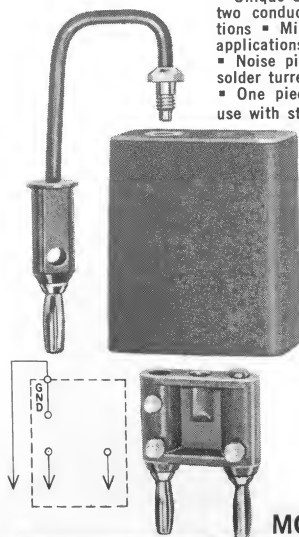


MODEL 1921

NET 4.85



ADAPTER — UHF RECEPTACLE TO DOUBLE BANANA PLUG



Permits UHF plug to be used with equipment having banana jacks.

UPPER: UHF receptacle, $\frac{5}{8}$ " dia.

LOWER: Double banana plug, on $\frac{3}{4}$ " centers. Cross holes (.166 dia.) in body provide side Stack-Up connections.


COLOR: Black.

MODEL 1707

NET 4.85



ADAPTER — UHF RECEPTACLE TO SHIELDED BANANA PLUGS



Permits UHF plug to be used with equipment having banana binding posts. Black anodized shield reduces noise pick-up at least 70 DB.


UPPER: UHF receptacle, $\frac{5}{8}$ " dia.

LOWER: Double banana plug on $\frac{3}{4}$ " centers.


COLOR: Black.

MODEL 1708

NET 4.85



ADAPTER — BINDING POSTS TO UHF RECEPTACLE



Permits single or double banana plugs to be used with equipment having UHF plug.


UPPER: Insulated binding posts, on $\frac{3}{4}$ " centers with .166 dia. jacks. Cross holes (.166 dia.) in body provide side Stack-Up connections.

LOWER: UHF receptacle, $\frac{5}{8}$ " dia.


COLOR: Body, Black. Binding posts: Black/Red.

MODEL 1792

NET 5.85



ADAPTER — BINDING POSTS TO UHF PLUG



Permits single or double banana plugs to be used with equipment having a UHF receptacle, $\frac{5}{8}$ " dia. Convenient for use with modern oscilloscopes. Center conductor binding post Red; Ground, Black.

UPPER: Insulated binding posts, on $\frac{3}{4}$ " centers with .166 dia. jacks.

LOWER: UHF plug.

MODEL 1699

NET 4.85



ADAPTER — BINDING POST TO UHF PLUG



Permits single banana plug to be used with equipment having a UHF receptacle, $\frac{5}{8}$ " dia. Adds flexibility to your oscilloscope.



UPPER: Insulated binding post with .166 dia. banana jack.

LOWER: UHF plug.

MODEL 1698

NET 3.85

INSULATED SHORTING BAR



MODEL 1730
(Specify color)

Used as a connecting link with equipment having tip jacks. Plugs internally solder bonded with 14 AWG wire. Top stack-up feature.

Current rating: 5 AMPS. cont., 10 AMPS. int. "Shorting Bar" marked on top of plug.



UPPER: Banana jacks, .166 dia. on 3/4" centers. Brass, nickel plated.

LOWER: Pin tips, .080 dia. on 3/4" centers. Brass, nickel plated. Cross holes (.166 dia.) in body provide side Stack-Up connections.

COLORS: Black, Red.

NET .75

PLUG — COMPONENT MOUNTING — DOUBLE PIN TIP PLUG—SOLDER TURRETS



MODEL 1904 (Specify color)

Features recess for mounting components. Gold flashed solder turrent terminals for permanent noise-free connections.



UPPER: Tip jacks, beryllium copper, gold flashed; spaced on 3/4" centers to accept .080 dia. pin tip plugs.

LOWER: Pin tips, .080 dia. brass, nickel plated.

COLORS: Black, Red.

NET .85

COMPONENT MOUNTING PLUG— BANANA JACKS TO DOUBLE PIN TIP —SET SCREWS



MODEL 1858

Permits single or double banana plugs to be used in equipment having tip jacks. Features recess for component mounting. Internal set screws firmly secure wire leads.

UPPER: Banana jacks, .166 dia., on 3/4" centers. Brass, nickel plated.

LOWER: Pin tips .080 dia. on 3/4" centers. Brass, nickel plated.

COLOR: Black.

NET .75

ADAPTER — BANANA JACK TO PIN TIP



MODEL 1432 (Specify Color)

Permits standard single banana plug patch cords to be used with equipment having tip jacks.

UPPER: Banana jack, .166 dia. Brass, nickel plated.

LOWER: Pin tip, .080 dia. Brass, nickel plated. Cross hole (.166 dia.) in body provides side Stack-Up connection.

COLORS: Black, Red.

NET .15

SOLDERLESS PIN TIP PLUG—STACK-UP



MODEL 1922 (Specify color)

Wire firmly held in place with internal set screw, eliminating soldering. Assembly of test leads simplified.


UPPER: Tip jack, beryllium copper, gold flashed; accepts .080 dia. pin.

LOWER: Pin tip, .080 dia., brass, nickel plated.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.


NET .50

DOUBLE BANANA PLUG SPLICE



Provides rapid method for splicing cables. Reduces necessity of storing extra long cables. Molded thermo-plastic body eliminates shock hazard by completely enclosing banana plug contact. Brass, nickel plated banana jacks. .166 dia., on 3/4" centers.

COLORS: Black, Red.



MODEL 1823 (Specify color)

NET .50


SINGLE BANANA PLUG SPLICE



MODEL 1829 (Specify color)

Provides rapid method for splicing single banana plug patch cords. Reduces the necessity of storing extra long patch cords. Molded thermo-plastic body eliminates shock hazard by completely enclosing banana plug contact. Brass, nickel plated banana jack, .166 dia.

COLORS: Black, Red.



NET .25

ADAPTER — .080 TIP JACK TO BANANA PLUG



MODEL 1809 (Specify Color)

Permits .080 dia. pin tip patch cords to be used with equipment having banana jacks. Insulation molded to plug body.

UPPER: Tip jack, beryllium copper, gold flashed. Accepts .080 dia. pin.

LOWER: Banana plug, one piece nickel plated beryllium copper spring for use with standard 0.166 dia. banana jack.

COLORS: Black, Red.

NET .50

SOLDERLESS BANANA PLUG —STACK-UP



MODEL 1325 (Specify color)

Wire firmly held in place with internal set screw, eliminating soldering. Assembly of test leads simplified.


UPPER: Banana jack, .166 dia.; Brass, nickel plated.

LOWER: Banana plug, one piece nickel plated beryllium copper spring for use with standard 0.166 dia. banana jack.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

NET .50

SOLDERLESS BANANA PLUG WITH SAFETY COLLAR —STACK-UP



MODEL 1825 (Specify Color)

Features: Integral safety collar insulates exposed wire leads. Wire firmly held in place with internal set screw, eliminating soldering. Assembly of test leads simplified.

UPPER: Banana jack, .166 dia.; Brass, nickel plated.

LOWER: Banana plug, one piece nickel plated beryllium copper spring for use with standard 0.166 dia. banana jack.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

NET .50

CREATE passive and active networks, voltage dividers, isolation networks or attenuators with the Split-Terminal isolation plugs described below.


Gold flashed solder turret terminals provide permanent, reliable noise-free connections for component mounting.

Tough thermo-plastic material molded to plug body and connectors insures maximum strength, moisture resistance and excellent insulative properties.

Specifications for MDP-X, 1390, 1837, 1468:

- Fits standard 0.166 dia. banana jack.
- Spring, heat treated beryllium copper alloy 25 per QQ-C-533.
- Plug body, Brass per QQ-B-626 Comp. 22.
- Nickel plated per QQ-N-290, Class 2.
- Contact resistance less than 0.001 ohms per banana plug.

TYPICAL APPLICATION

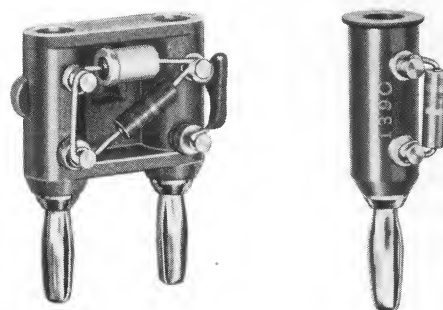


ACTUAL SIZE



MODEL MDP-X

MODEL 1390

DOUBLE BANANA PLUG, FOUR TERMINAL ISOLATION



MODEL MDP-X



Provides four terminal isolation. Top Stack-Up receptacles isolated from lower plugs. Ideal for insertion of matching networks in laboratory VTVM's, signal generators, etc. Gold flashed solder turret terminals for permanent noise-free connections.


UPPER: Double banana jacks, .166 dia., on 3/4" centers.

LOWER: Double banana plug on 3/4" centers.


COLOR: Red.

NET 3.25

DOUBLE BANANA PLUG, THREE TERMINAL ISOLATION



MODEL 1837




Provides three terminal isolation. Excellent for "L" and "Pi" networks. Plug and receptacle nickel plated. Gold flashed solder turret terminals for permanent noise-free connections. "Ground" is straight feed-thru. Hot side isolated.

UPPER: Banana jacks, .166 dia. on 3/4" centers.


LOWER: Double banana plug on 3/4" centers.

COLOR: Blue.


NET 2.50



ADAPTER — BINDING POSTS TO BNC PLUG, ISOLATION



MODEL 1469



Permits single or double banana plugs to be used with equipment having BNC receptacle. Provides isolation for a four terminal network. Binding posts facilitate connections of test leads or additional components. Gold flashed solder turret terminals provide permanent noise-free connections.

UPPER: Insulated binding posts, on 3/4" centers with .166 dia. jacks.


LOWER: BNC plug.

COLOR: Body, Black.


Binding Posts: Black/Red.

NET 10.85

ADAPTER — BNC RECEPTACLE TO DOUBLE BANANA PLUG, ISOLATION



MODEL 1468



Permits BNC plug to be used with equipment having banana jacks. Provides isolation for a four terminal network. Excellent for matching pad networks. Gold flashed solder turret terminals for permanent noise-free connections.

UPPER: BNC receptacle.

LOWER: Double banana plug, on 3/4" centers.


COLOR: Black.

NET 9.85

PLUG — SINGLE BANANA, ISOLATION



MODEL 1390 (Specify color)



Provides two terminal isolation. Top Stack-Up receptacle is isolated from lower plug to permit addition of series resistors, diodes, etc. Ideal for computers, lab. circuit design and testing. Gold flashed solder turret terminals for permanent noise-free connections.

UPPER: Banana jack, .166 dia.

LOWER: Banana plug.

COLORS: Black, Red.

NET .95

PLUG — PIN TIP, ISOLATION



MODEL 1910 (Specify color)




Pin tip jack is isolated from .080 pin tip plug. Provides for addition of series components. Ideal for use with computer boards, lab circuit designs, etc. Gold flashed solder turret terminals for permanent noise-free connections.

UPPER: Tip jack, beryllium copper, gold flashed; accepts .080 dia. pin.

LOWER: Pin tip, .080 dia. Brass, nickel plated.

COLORS: Black Red.



NET .95



Miniature Double Banana plugs on 1/2" centers. A state of the art development for the ever increasing demand for miniaturization. Banana plug springs precision formed of one piece beryllium copper, heat treated for maximum life and low contact resistance. Tough thermoplastic molded to plug bodies.

SPECIFICATIONS:

- Fits .104 dia. miniature banana jacks.
- Plug body brass, per QQ-B-626, Comp. #22.
- Gold flashed per MIL-G-45204 Type II (.00002/.00003).

NEW

MINIATURE—DOUBLE BANANA PLUG WITH SET SCREWS



Miniature double banana plug on 1/2" centers. Internal set screws to secure cable or component leads. .104 dia. banana jacks on 1/2" centers permit top Stack-Up for multiple connections.

COLORS: Black, Red.

RATINGS:

Operating Temp: -25°C to +85°C.
Working voltage: 2500 VDC.
Current: 5 Amps Cont., 10 Amps Int.


MODEL 2244 Black
MODEL 2244-2 Red

MODEL 2244

NET .75

NEW

MINIATURE—DOUBLE BANANA PLUG WITH SOLDER TURRET TERMINALS



Miniature double banana plug on 1/2" centers. Solder turret terminals for permanent noise-free connections of cables or components. .104 dia. banana jacks on 1/2" centers permit top stack-up for multiple connections.

COLORS: Black, Red.

RATINGS:

Operating Temp: -25°C to +85°C.
Working voltage: 2500 VDC.
Current: 5 Amps Cont., 10 Amps Int.


Model 2245 Black
Model 2245-2 Red

MODEL 2245

NET .85

NEW

MINIATURE—DOUBLE BANANA PLUG WITH MOLDED PRECISION RESISTOR



Ideal where rapid interchange of resistance values is required. Deposited carbon 1% 1/4 watt, molded internally. .104 dia. banana jacks on 1/2" centers permit Top Stack-Up for multiple connections. Resistance value stamped on plug.


(OHMS) 50 10K
600 50K
1K 100K

MODEL 2246 (Specify Value)

NET 2.75

NEW

MINIATURE—DOUBLE BANANA PLUG WITH SHORTING BAR



Ideal as a connecting link for use with 1/2" spaced banana jacks. .104 dia. banana jacks on 1/2" centers permit top Stack-Up for multiple connections. Banana plugs internally solder-bonded with #18 AWG wire. "Shorting Bar" stamped on plug.

COLORS: Black, Red.

RATINGS:

Operating Temp: -25°C to +85°C.
Current: 5 Amps Cont., 10 Amps Int.


MODEL 2035 Black
MODEL 2035-2 Red

MODEL 2035

NET .95

NEW

MINIATURE—DOUBLE BANANA PLUG BOTH ENDS



CONN: 1st END } Miniature Double Banana plug on 1/2" centers.

CABLE: Shielded Coax., RG174/U.

CONN: 2nd END } Miniature double banana plug on 1/2" centers.

Banana jack body, one piece machined brass, gold flashed. .104 dia. banana jacks on 1/2" centers permit top Stack-Up for multiple connections. Tough thermoplastic molded to plug bodies. Molded double plug matches color of cable. RG174/U Cable, Black.

A miniature double banana plug on 1/2" centers. This patch cord enables miniaturization of test equipment and high density packaging for patch systems. Banana plug springs precision formed of one piece beryllium copper, heat treated for maximum life and low contact resistance.

RATINGS: Operating Temp: -25°C to +80°C.
Working Voltage: 1500 VDC.

MODEL	LENGTH	NET
2247-K-12	12"	4.85
2247-K-24	24"	4.85
2247-K-36	36"	4.85
2247-K-48	48"	5.00

Developed by the need for miniaturization of test equipment and test panels. The new generation of test jacks. Built to Pomona Electronics high standard of quality.

Wide selection of colors available.


Molded of High Impact Polycarbonate Thermoplastic. Banana Jack body, one piece machined brass, gold flashed. Heavy duty shouldered ceramic insulator. Lockwasher and hex nut included, unassembled, nickel plated.

SPECIFICATIONS:

- Closed entry jack .104 dia.
- Insulator head molded to body
- Mounts in 1/4" dia. hole
- Model 2142, Panels up to 1/4" thick
- Model 2143, Panels up to 3/8" thick
- Solder turret terminal

RATINGS:

Operating Temp: -65°C to +150°C.
Working Voltage: 1500 VDC
Current: 5 Amps Cont., 10 Amps Int.





MINIATURE—INSULATED BANANA JACK

2142 —Black	2142-5—Green
2142-1—Brown	2142-6—Blue
2142-2—Red	2142-7—Violet
2142-3—Orange	2142-8—Gray
2142-4—Yellow	2142-9—White

MODEL 2142

Standard Package: 10 (per color) NET .25



MINIATURE—INSULATED DOUBLE BANANA JACK

Double banana jack on 1/2" centers with one red and one black jack. Choice of Black or Red plate.


MODEL 2143 —Black Plate
MODEL 2143-2—Red Plate

MODEL 2143

NET .75

NEW

MINIATURE—DOUBLE BANANA PLUG TO BNC MALE



CONN: 1st END } Miniature Double Banana Plug on 1/2" centers

CABLE: Shielded Coax., RG174/U

CONN: 2nd END } Male BNC

CABLE DESCRIPTION: Shielded coax., RG174/U, Polyethylene Insulation. Vinyl jacket. Nom. Cap. 29.5 pf/ft. Nom. Imp. 50 Ohms. Nom. O.D. .100". Color: Cable and Double plug, Black.


MODEL	LENGTH
2248-K-12	12"
2248-K-24	24"
2248-K-36	36"

MODEL 2248

NET 5.85

NEW

MINIATURE—BANANA PLUG STACK-UP PATCH CORD

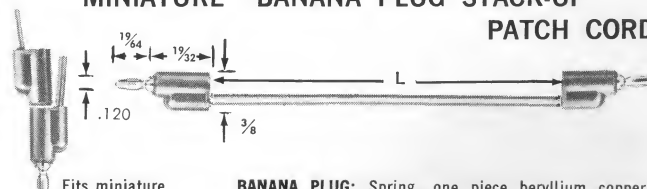

Fits miniature banana jacks with .104 dia. Compact size. For use where receptacles are spaced closely together.

BANANA PLUG: Spring, one piece beryllium copper heat treated. Gold flashed.
WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation .087" O.D.
RATED: 5 A. Cont., 10 A. Int.
5,000 W.V.D.C.
OPERATING TEMP.: -0°C to +105°C.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL	LENGTH	MODEL	LENGTH
1081-4	4"	1081-18	18"
1081-8	8"	1081-24	24"
1081-12	12"	1081-36	36"

MODEL 1081 (Specify Color)


NET 1.50

Boxes of unlimited uses for packaging of components and circuitry. Also ideal for potting and encapsulating. Available in three sizes as shown below. Housing molded of thermosetting electrical grade phenolic. Cover, punched XXP laminated paper base phenolic. Color, Housing and cover, Black. Cover plate and self tapping screws included.

Operating Temperature: -25°C to $+125^{\circ}\text{C}$.

NEW

BLACK BOX—JUNIOR SIZE

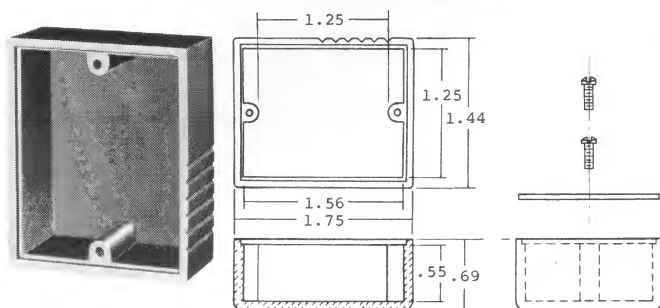


MODEL 2105

NET .75

NEW

BLACK BOX—QUEEN SIZE

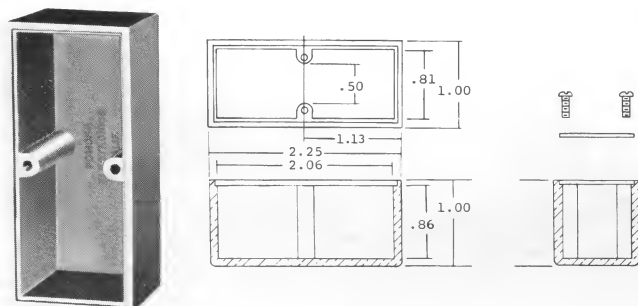


MODEL 2103

NET .75

NEW

BLACK BOX—KING SIZE

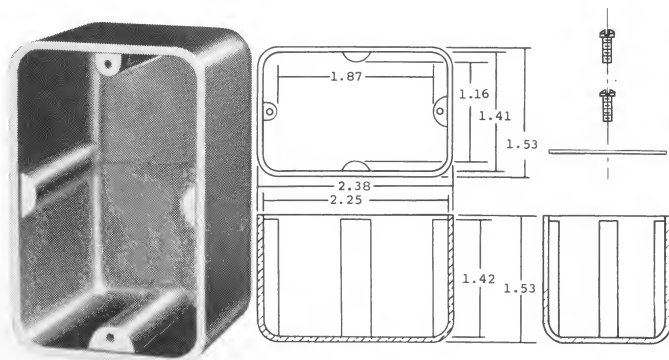

MODEL 2104

NET .75

"BLACK BOXES"

CREATE passive and active networks, voltage dividers, isolation networks or attenuators with these units. Solder turret terminals for permanent noise-free connection of components, etc. Entire unit may be potted or encapsulated.

Housing molded of thermosetting electrical grade phenolic. Cover, punched XXP laminated paper base phenolic. Color, housing and cover, BLACK. Cover plate and self tapping screws included.

APPLICABLE SPECIFICATIONS:



Operating Temp: -25°C to $+125^{\circ}\text{C}$.

Working Voltage: 5000 VDC.

Current: 15 Amps Cont., 30 Amps Int.

NEW

COMPONENT MOUNTING—ACROSS BANANA PLUGS

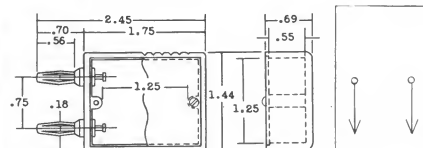

UPPER: No Connection.



LOWER: Banana plugs on $\frac{3}{4}$ " centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

MODEL 2096

NET 1.95

NEW

COMPONENT MOUNTING—BANANA JACKS TO DOUBLE BANANA PLUG—JUNIOR SIZE



UPPER: Banana jacks, .166" dia. and solder turret terminals on $\frac{3}{4}$ " centers. Brass, nickel plated. Polarity indicator on top, color, RED.



LOWER: Banana plugs on $\frac{3}{4}$ " centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

MODEL 2098

NET 2.85

NEW

COMPONENT MOUNTING—BANANA JACKS TO DOUBLE BANANA PLUG—KING SIZE

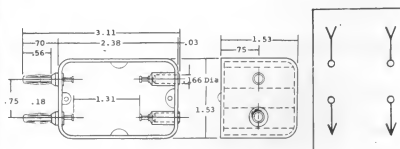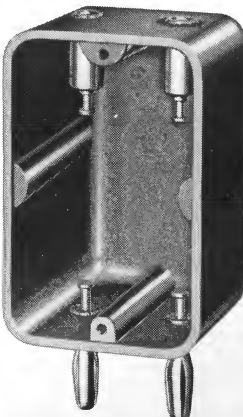

UPPER: Banana jacks, .166" dia. and solder turret terminals on $\frac{3}{4}$ " centers. Brass, nickel plated. Polarity indicator on top, color, RED.

LOWER: Banana plugs on $\frac{3}{4}$ " centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

MODEL 2224



NET 2.95

CREATE passive and active networks, voltage dividers, isolation networks or attenuators with these units. Solder turret terminals for permanent noise-free connection of components, etc. Entire unit may be potted or encapsulated.

Housing molded of thermosetting electrical grade phenolic. Cover, punched XXP laminated paper base phenolic. Color, housing and cover, BLACK. Cover plate and self tapping screws included.

NEW

COMPONENT MOUNTING—BNC RECEPTACLE TO DOUBLE BANANA PLUG

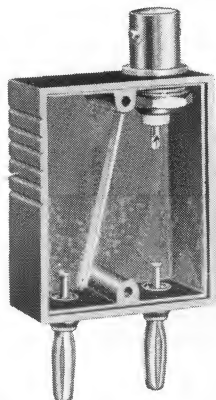

UPPER: BNC Receptacle UG1094/U

LOWER: Banana plugs on 3/4" centers. One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.

APPLICABLE SPECIFICATIONS:



Operating Temp: -25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2097

NET 3.85

NEW

COMPONENT MOUNTING—BNC RECEPTACLE BOTH ENDS

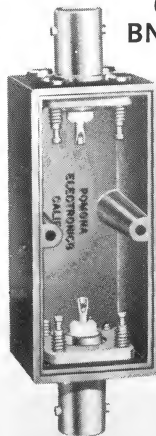

UPPER: BNC Receptacle UG290A/U

LOWER: BNC Receptacle UG290A/U

APPLICABLE SPECIFICATIONS:



Operating Temp: -25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2101

NET 4.85

NEW

COMPONENT MOUNTING—BNC RECEPTACLE TO BNC PLUG WITH BINDING POSTS

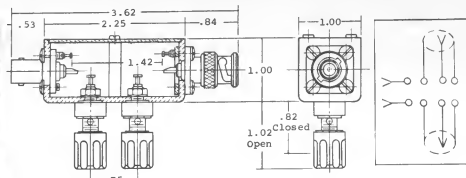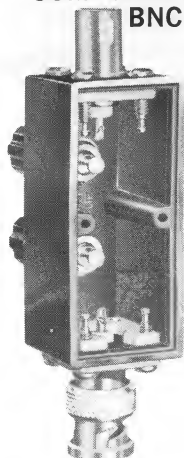

UPPER: BNC Receptacle UG290A/U

CENTER: Banana jack binding posts with solder turret terminals. Red and Black.

LOWER: BNC Plug. UG1104A/U.



APPLICABLE SPECIFICATIONS:

Operating Temp: -25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2100

NET 8.95

COMPONENT MOUNTING—BNC RECEPTACLE TO BNC PLUG

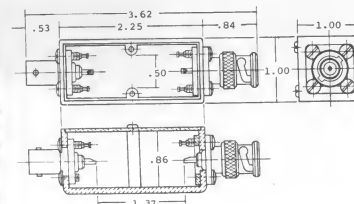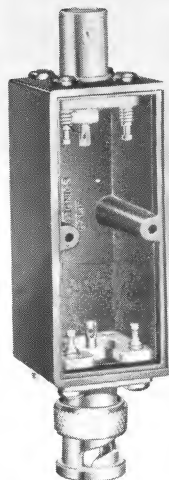

UPPER: BNC Receptacle UG290A/U

LOWER: BNC Plug UG1104A/U

APPLICABLE SPECIFICATIONS:


Operating Temp: -25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2099

NET 6.85

NEW

COMPONENT MOUNTING—(3) 3/4" SPACED BANANA PLUGS

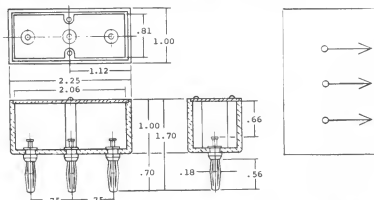

Three-in-line 3/4" Spaced Banana Plugs.

One piece beryllium copper spring, heat treated, nickel plated. Plug body and solder turret terminals, brass, nickel plated. For use with standard .166" dia. banana jacks.



APPLICABLE SPECIFICATIONS:

Operating Temp: -25°C to +125°C.
Working Voltage: 5000 VDC.
Current: 15 Amps Cont., 30 Amps Int.

MODEL 2095

NET 2.75

COMPONENT MOUNTING—BNC RECEPTACLE "T"

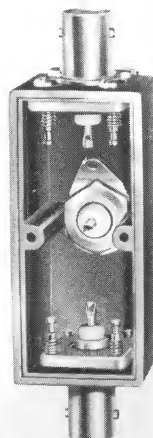

UPPER: BNC Receptacle UG290A/U

CENTER: BNC Receptacle UG1094/U

LOWER: BNC Receptacle UG290A/U

APPLICABLE SPECIFICATIONS:


Operating Temp: -25°C to +125°C.
Working Voltage: 500 V Peak.

MODEL 2102

NET 7.85

NEW

PATCH CORD — SINGLE BANANA PLUGS BOTH ENDS

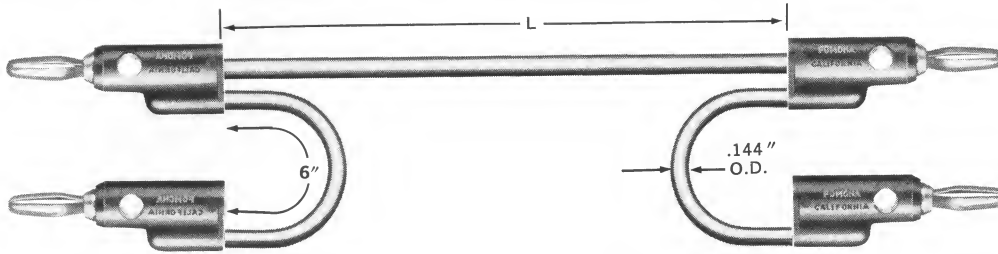

CONN: } Single Banana Plugs.
1st END } Colors: Inner Conductor plug,
Red. Ground Plug, Black.

CABLE: Shielded Coax.,
RG58C/U

CONN: } Single Banana Plugs.
2nd END } Colors: Inner Conductor plug,
Red. Ground Plug, Black.

Banana plug spring one piece heat treated beryllium copper alloy #25 per QQ-C-533. Body, brass, H.H. per QQ-B-626, Comp. #22. Finish: Nickel plate per QQ-N-290, Class 2, (.0002 min.).


CABLE DESCRIPTION:

Shielded coax., RG58C/U, Polyethylene Insulation. Vinyl jacket, .195" O.D. Nom. Cap. 28.5 pf/ft.

MODEL	LENGTH	NET
2239-24	24"	4.85
2239-36	36"	4.85
2239-48	48"	5.00

NEW

TEST PROBE TO BNC RECEPTACLE

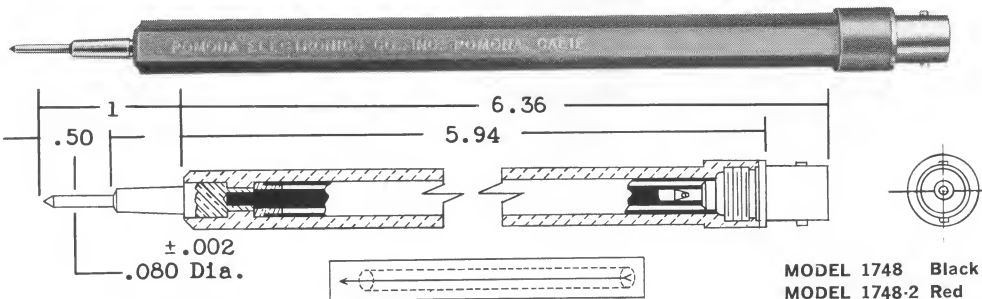

MODEL 1748 Black
MODEL 1748-2 Red

NET 4.85


BNC receptacle in handle connected to tip. Permits the use of coaxial cables with BNC plug for circuit testing as a test prod. Tough thermoplastic molded to BNC receptacle and tip.

PIN TIP: .080" dia. x 1/2" long, brass, nickel plated.

RECEPTACLE: BNC, UG1094/U.

MODEL	LENGTH
1958-4	4"
1958-8	8"
1958-12	12"
1958-24	24"
1958-36	36"

MODEL 1958
(Specify Color)



ALLIGATOR CLIP LEAD TO PIN TIP


Adapts to equipment using tip jacks.
CLIP: Alligator, steel, cad plated.
PIN TIP: .080 dia. x 1/2" long. Brass nickel plated.
Tough thermo-plastic molded to body.

INSULATOR: Red vinyl with red wire. Black on all other colors.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144" O.D.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red.

NET .95

MODEL	LENGTH
1959-4	4"
1959-8	8"
1959-12	12"
1959-24	24"
1959-36	36"

MODEL 1959
(Specify Color)



ALLIGATOR CLIP LEAD TO BANANA PLUG


Adapts to equipment using standard banana jacks.
CLIP: Alligator, steel, cad plated.
BANANA PLUG: Spring, one piece beryllium copper, heat treated, nickel plated. Tough thermoplastic molded to body.

INSULATOR: Red vinyl with red wire. Black on all other colors.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144" O.D.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red.

NET .95

NEW

RIGHT ANGLE SHIELDED DOUBLE PLUG BOTH ENDS

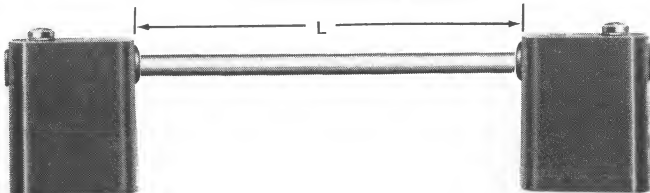

CONN: } Right Angle
1st END } Shielded double plug
on 3/4" centers.
Black anodized
aluminum shield.

CABLE: Shielded
coax.
RG58C/U.

CONN: } Right Angle
2nd END } Shielded double
plug on 3/4" centers.
Black anodized alu-
minum shield.

CABLE DESCRIPTION:
Shielded coax., RG58C/U, polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.

MODEL	LENGTH	NET
2204-C-24	24"	7.85
2204-C-36	36"	7.85
2204-C-48	48"	8.00


ADAPTER—BNC RECEPTACLE TO SINGLE BANANA PLUG

Permits BNC plug to be used with equipment having banana jacks. Inner conductor connected only. Excellent for adapting laboratory VTVM, oscilloscopes and signal generator inputs to readily available coaxial cables.

UPPER: BNC receptacle,
UG1094/U.

LOWER: Single Banana Plug.


COLOR: Black.



MODEL 1894

NET 2.50

TRANSISTOR SOCKET



For use in testing 3 lead transistors with .017 dia. leads. Beryllium copper springs for long life. Ideal for aging racks, incoming inspection, life testing, etc.




**MODEL
TS-187**



**MODEL
TS-187R**

MODEL	TEMP. RANGE	INSULATION RESISTANCE	COLOR	NET
TS187	-100°C To +300°C.	1 x 10 ⁵ Megohms Min. @ 500 V.D.C. @ 40% R.H., 24°C.	Black	1.75
TS187R	-125°C To +700°C.	1 x 10 ⁶ Megohms Min. @ 500 V.D.C. @ 40% R.H., 24°C.	Red	3.75



**MODEL
1614**

INSULATED SPADE LUG ADAPTER


Permits single banana plug to be used with equipment having binding posts. Tough thermoplastic molded to body for maximum reliability and low shock hazard. Spade lug body, one piece machined brass, nickel plated.

UPPER: Banana jack, .166 dia.
LOWER: Spade lug, .26 opening.
COLORS: Black, Red.


(Specify color)

NET .35

ADAPTER — TRANSISTOR TEST SOCKET







MODEL 1472



Permits the insertion of transistors with .017 dia. leads into equipment having banana jacks on 3/4" centers. Ideal for incoming inspection. Transistor socket contact and banana spring made of beryllium copper. Heavy duty phenolic construction. Insulation resistance: 1 x 10⁵ megohms min. @ 500 V.D.C., at 40% R.H., 24°C.

NET 5.85

DOUBLE BANANA PLUG CABLE SPLICE

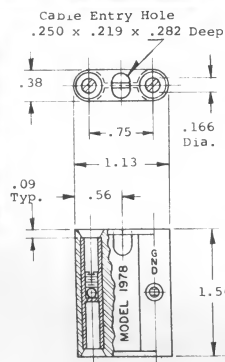


Provides rapid method for splicing cables. Internal set-screws firmly secure leads. Cable strain relief provided for extra pull-strength. Beveled thru-holes eliminate shock hazard by completely enclosing banana plug contact. Standard .166 dia. banana jacks, on 3/4" centers.
RECEPTACLES: Brass, nickel plated, .166 dia.
PLUG BODY: Tough Thermoplastic molded to receptacle.
COLORS: Black, Red.

NET .75

MODEL 1978 (Specify Color)

ADAPTER — AMP PROGRAM BOARD



Permits single or double banana plugs to be used with AMP program boards having 1/4" or 3/8" center to center spacing. Ideal for mounting components. Internal set screws secure leads. Useful in analog computer applications, etc.

UPPER: Banana jacks, on 3/4" centers. Brass, nickel plated.


LOWER: Dual AMP pins, on 1/4" or 3/8" centers.

MODEL	PIN SPACING	COLOR	NET
1977	3/8"	Black	3.85
1991	1/4"	Gray	3.85


MODEL 1977

MODEL 1991

INSULATED ALLIGATOR CLIP TO BANANA JACK



Clip, No. 60 Mueller, Steel, Cadmium Plated. Vinyl insulators, No. 62 (5 Red, 5 Black). Unassembled.




Standard Package of 10 clips and 10 insulators.


MODEL 2240

NET .15

INSULATED ALLIGATOR CLIP TO PIN TIP JACK



Alligator Clip, Steel, Cad. Plated. Tip Jack, Beryllium Copper, gold flashed, accepts .080 diam. Pin tip plug. Vinyl insulators (5 Red, 5 Black). Unassembled.



Standard Package of 10 clips and 10 insulators.

MODEL 1437

NET .50


INSULATED BANANA JACK ASSEMBLY

Used with standard banana plug. Body, one piece brass, silver plated. Heavy duty shouldered ceramic insulator. Nickel plated lockwasher and hex nut included. Unassembled.



FEATURES:

- Closed entry receptacle, .166 dia.
- Insulator head molded to body
- Mounts in 3/8" dia. hole, panels up to 3/8" thick.
- Solder turret terminal
- Rated: 2,500 WVDC



1581 — Black
1581-1 — Brown
1581-2 — Red
1581-3 — Orange
1581-4 — Yellow

1581-5 — Green
1581-6 — Blue
1581-7 — Violet
1581-8 — Gray
1581-9 — White


Standard Package: 10 (per color)

MODEL 1581 (Specify Color)

NET .25

POMONA BANANA PLUG PATCH CORDS

Tough thermoplastic insulation molds the plug and leads into a strong moisture resistant integral unit. Excellent for computer board and test equipment applications. Used by leading industries in applications where extreme reliability is of prime importance.

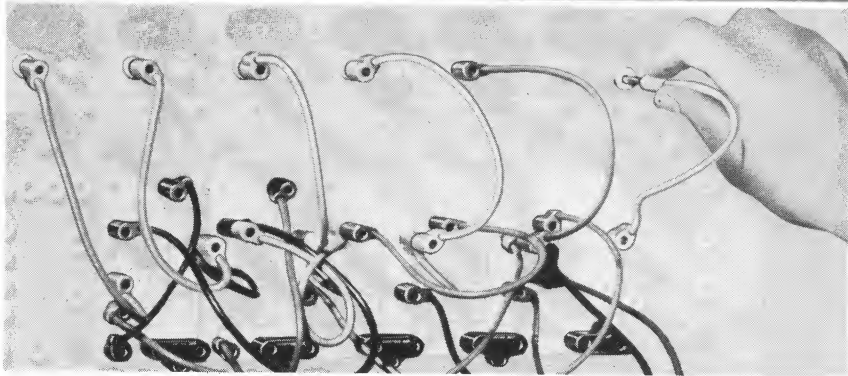

FEATURES


- One piece beryllium copper heat treated spring for maximum long life.
- Rounded spring design results in maximum contact area.
- Extra flexible polyvinyl insulation used on all leads.

SPECIFICATIONS


- Fits standard 0.166 dia. banana jacks.
- Spring, beryllium copper alloy 25 per QQ-C-533.
- Plug body, brass per QQ-B-626, Comp. 22.
- Nickel plated per QQ-N-290, Class 2.
- Contact resistance less than 0.001 ohms per banana plug.
- Operating Temp.: -0°C to $+105^{\circ}\text{C}$.
- Wire, 18 AWG, stranding 65 x 36 T.C.
- Insulation, polyvinyl .144" O.D.
- Ratings: 15 A. Cont., 30 A. Int. 10,000 W.V.D.C.

MODEL LENGTH

B-4	4"
B-8	8"
B-12	12"
B-18	18"
B-24	24"
B-36	36"




STACK-UP BANANA PLUG PATCH CORD



Multiple stacking feature accommodates the most complex stacking; keeps circuitry neater. Greatly simplifies circuit connections and changes. Reliable solder-bonded connections withstand pull test in excess of 50 lbs. Banana plugs both ends.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.




MODEL B (Specify Color)

NET 1.50


MODEL LENGTH

HB-4	4"
HB-8	8"
HB-12	12"
HB-18	18"
HB-24	24"
HB-36	36"

(Specify Color)



EXTENSION STACKING BANANA PLUG PATCH CORD




Dual purpose. Insulates all hot leads when used as an extension cord. Endless extension couplings possible with any banana plug patch cord. Provides vertical stacking from any jack. Reliable solder-bonded connections withstand pull test in excess of 50 lbs. Banana plugs both ends.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL HB


NET 1.75




MODEL LENGTH

1440-4	4"
1440-8	8"
1440-12	12"
1440-18	18"
1440-24	24"
1440-36	36"

(Specify Color)



HORIZONTAL STACKING BANANA PLUG PATCH CORD



Ideal as an interconnecting lead between power supplies, test equipment, etc. Horizontal stacking feature. Banana plugs on both ends.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.


MODEL 1440

NET 1.00

MODEL LENGTH

1985-4	4"
1985-8	8"
1985-12	12"
1985-18	18"
1985-24	24"
1985-36	36"

(Specify Color)



BANANA PLUG PATCH CORD

Excellent for general lab work. Permits interconnection between test instruments, etc. Banana plugs both ends.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL 1985

NET .85

OTHER LENGTHS AVAILABLE TO ORDER

MODEL	LENGTH
P-4	4"
P-8	8"
P-12	12"
P-18	18"
P-24	24"
P-36	36"

MODEL P

(Specify Color)

NET 1.75



STACK-UP

PIN TIP VERTICAL STACKING PATCH CORD

A must in circuit designing and testing, with instruments that utilize tip jacks.

PIN TIP: .080 dia., 1/2" long, brass, gold flashed.


TIP JACK, STACK-UP: Beryllium copper, gold flashed. Accepts .080 dia. pin.

WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation .087" O.D.

RATED: 5 A. Cont., 10 A. Int.
5,000 W.V.D.C.

OPERATING TEMP.: -0°C to +105°C.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.




MODEL	LENGTH
1727-4	4"
1727-8	8"
1727-12	12"
1727-18	18"
1727-24	24"
1727-36	36"

MODEL 1727

(Specify Color)

NET 1.85

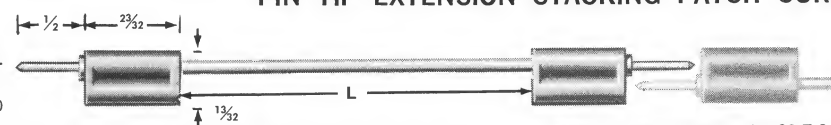

Dual purpose, insulates exposed leads when used as an extension cord. Endless extension coupling possible. Also provides stacking from .080 jack.

PIN TIP: .080 dia., 1/2" long, brass, gold flashed.


TIP JACK: Beryllium copper, gold flashed. Accepts .080 dia. pin.

WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible polyvinyl insulation .087" O.D.

RATED: 5 A. Cont., 10 A. Int.
5,000 W.V.D.C.

OPERATING TEMP.: -0°C to +105°C.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.



MODEL	LENGTH
1990-4	4"
1990-8	8"
1990-12	12"
1990-18	18"
1990-24	24"
1990-36	36"

MODEL 1990

(Specify Color)

NET .75



Heavy Duty patch cord. Excellent for general lab work. Permits interconnection between test instruments that utilize tip jacks.

PIN TIP: .080 dia., 1/2" long, brass, nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144" O.D.

RATED: 5 A. Cont., 10 A. Int.
10,000 W.V.D.C.

OPERATING TEMP.: -0°C to +105°C.

COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

MODEL	LENGTH
PT063-4	4"
PT063-8	8"
PT063-12	12"
PT063-18	18"
PT063-24	24"
PT063-36	36"

MODEL PT & PM

(Specify Color)

NET .85

Small body style permits usage in equipment having receptacles spaced closely together. Three models shown.

PIN TIP: Brass, gold flashed.

WIRE: 22 AWG, Strand. 19 x 34 T.C. Insulation, polyvinyl .064" O.D.

RATED: 3 A. Cont., 7.5 A. Int.
1,000 W.V.D.C.

OPERATING TEMP.: -0°C to +105°C.


COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.

PIN TIP PATCH CORD

MODEL PT 063 — PIN .063 DIA. X 7/16" LONG

MODEL PT 080 — PIN .080 DIA. X 1/2" LONG

MODEL PM 080 — PIN .080 DIA. X 1/4" LONG

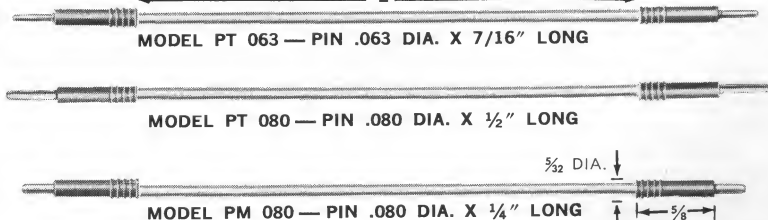


MODEL	LENGTH
1126-4	4"
1126-8	8"
1126-12	12"
1126-18	18"
1126-24	24"
1126-36	36"

MODEL 1126

(Specify Color)

NET 1.75

SIDE CONNECTION



BANANA PLUG TO PIN TIP STACK-UP PATCH CORD

Adapts to equipment using banana jacks and pin jacks. Banana plug and pin tip allow vertical stack-up.

BANANA PLUG: Spring, one piece beryllium copper, heat treated, nickel plated.

PIN TIP: .080 dia. 1/2" long, brass, gold flashed.

TIP JACK, STACK-UP: Beryllium copper, gold flashed. Accepts .080 Dia. pin.

WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible

polyvinyl insulation .087" O.D.

RATED: 5 A. Cont., 10 A. Int.
5,000 W.V.D.C.

OPERATING TEMP.: -0°C to +105 C.


COLORS: Black, Red.

OTHER LENGTHS AVAILABLE TO ORDER

INSULATED MINIGATOR CLIP LEAD—18 AWG

MODEL	LENGTH
MG-B-4	4"
MG-B-8	8"
MG-B-12	12"
MG-B-24	24"
MG-B-36	36"

MODEL MG-B
(Specify Color)



CLIP: Minigator, steel, cad plated.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible
polyvinyl insulation .144" O.D.

INSULATOR: Red vinyl with red wire. Black on all other colors.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red.

NET .95

NEW

MODEL	LENGTH
1236-4	4"
1236-8	8"
1236-12	12"
1236-24	24"
1236-36	36"

Model 1236
(Specify Color)

INSULATED MINIGATOR CLIP LEAD—20 AWG



CLIP: Minigator, steel, cad. plated.
WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible
polyvinyl insulation, .087" O.D.

INSULATOR: Red Vinyl with Red Wire. Black on all other
colors.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red.


NET .95

NEW

MODEL	LENGTH
1613-4	4"
1613-8	8"
1613-12	12"
1613-24	24"
1613-36	36"

Model 1613
(Specify Color)

INSULATED MICROGATOR CLIP LEAD—20 AWG



CLIP: Microgator, solid copper.
WIRE: 20 AWG, Strand. 41 x 36 T.C. Extra flexible
polyvinyl insulation, .087" O.D.


INSULATOR: Red Vinyl with Red Wire. Black on all other
colors.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red.

NET .95

MODEL	LENGTH
AL-B-4	4"
AL-B-8	8"
AL-B-12	12"
AL-B-24	24"
AL-B-36	36"

MODEL AL-B
(Specify Color)

INSULATED ALLIGATOR CLIP LEAD



CLIP: Alligator, steel, cad plated.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible
polyvinyl insulation .144" O.D.


INSULATOR: Red vinyl with red wire. Black on all other colors.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red.

NET .95

MODEL	LENGTH	NET
1743-12	12"	.95
1743-24	24"	.95
1743-36	36"	.95
1743-48	48"	1.00
1743-60	60"	1.05

(Typical Dimensions
spade lug)

MODEL 1743
(Specify Color)

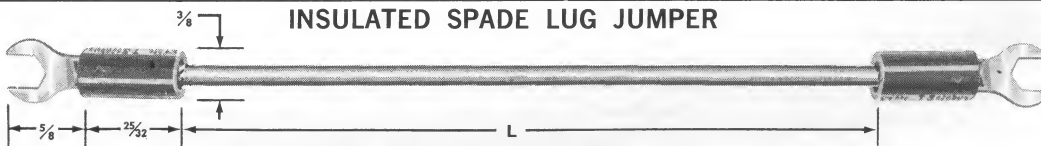


Spade lug heavy duty machined one piece brass.
Tough thermo-plastic molded to spade lug body.
SPADE LUGS: Brass $\frac{1}{16}$ " thick, nickel plated.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible
polyvinyl insulation .144" O.D.

RATED: 15 A. Cont., 30 A Int. 10,000 W.V.D.C.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red, Green, White.

MODEL	LENGTH	NET
1987-12	12"	.95
1987-24	24"	.95
1987-36	36"	.95
1987-48	48"	1.00
1987-60	60"	1.05

MODEL 1987
(Specify Color)

INSULATED SPADE LUG TO BANANA PLUG




Spade lug, heavy duty machined one piece brass. Tough
thermo-plastic molded to spade lug and pin tip body.
SPADE LUG: Brass $\frac{1}{16}$ " thick, nickel plated.
BANANA PLUG: Spring one piece beryllium copper heat
treated, nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl
insulation .144" O.D.
RATED: 15 A. Cont., 30 A Int. 10,000 W.V.D.C.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red, Green, White.

MODEL	LENGTH	NET
1989-12	12"	.95
1989-24	24"	.95
1989-36	36"	.95
1989-48	48"	1.00
1989-60	60"	1.05

MODEL 1989
(Specify Color)

INSULATED SPADE LUG TO PIN TIP



Spade lug, heavy duty machined one piece brass. Tough
thermo-plastic molded to spade lug and pin tip body.
SPADE LUG: Brass $\frac{1}{16}$ " thick, nickel plated.
PIN TIP: .080 did. $\frac{1}{2}$ " long. Brass nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl
insulation .144" O.D.
RATED: 5 A. Cont., 10 A Int. 10,000 W.V.D.C.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red, Green, White.

MODEL	LENGTH	NET
1960-12	12"	.95
1960-24	24"	.95
1960-36	36"	.95
1960-48	48"	1.00
1960-60	60"	1.05

MODEL 1960
(Specify Color)


INSULATED SPADE LUG TO ALLIGATOR CLIP



Spade lug, heavy duty machined one piece brass. Tough
thermo-plastic molded to spade lug body.
SPADE LUG: Brass $\frac{1}{16}$ " thick, nickel plated.
CLIP: Alligator, steel, cad plated.

INSULATOR: Red vinyl with red wire. Black on all other colors.
WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl
insulation .144" O.D.
OPERATING TEMP.: -25°C to +105°C.
COLORS: Black, Red, Green, White.

OTHER LENGTHS AVAILABLE TO ORDER

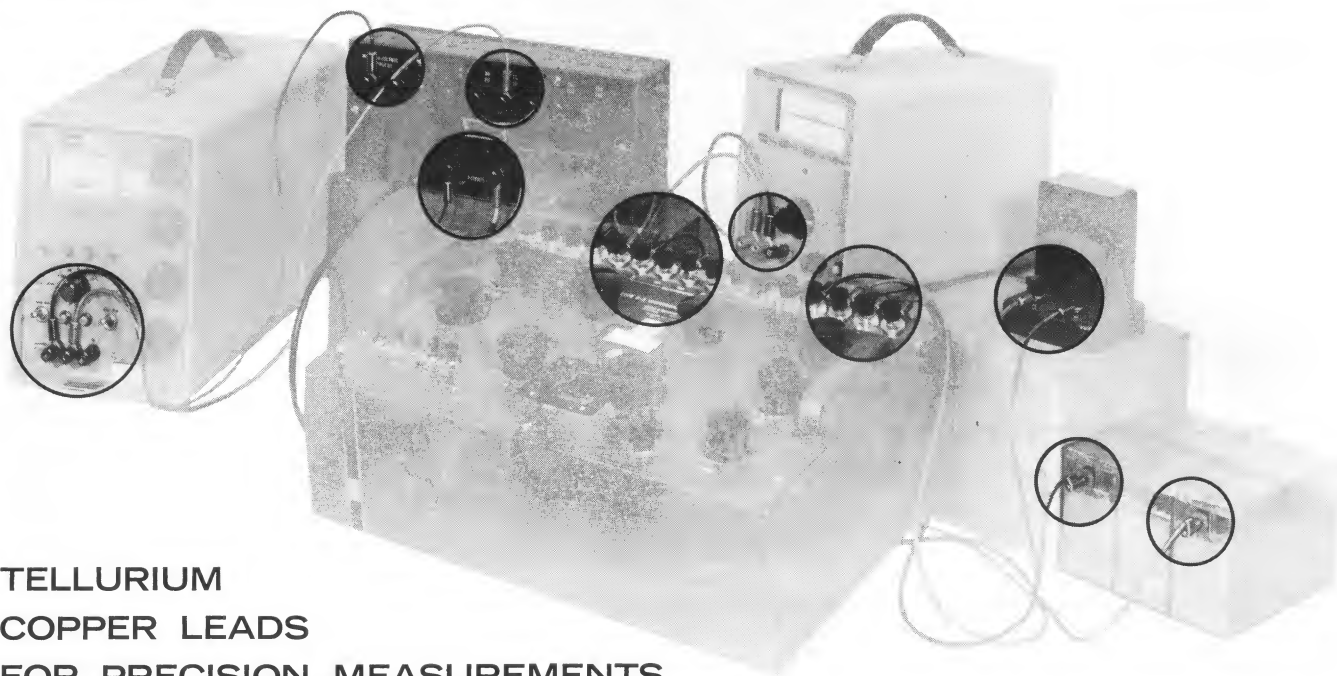

TELLURIUM COPPER LEADS FOR PRECISION MEASUREMENTS

POMONA ELECTRONICS has advanced the state of the art in measurements where Thermoelectric Effects are significant sources of error. Comparators designed for use with the Kelvin-Varley voltage divider and microvolt leads were tested with Primary Standards Laboratory equipment.

Thermoelectric voltages were not detected until the most sensitive galvanometer range was used.

THERMOELECTRIC PROPERTIES—Tellurium copper gold plated spade lugs cold-staked to multi-stranded

12 gauge COPPER wire minimize thermoelectric effects—an absolute necessity for low voltage, high precision measurements.


LOW RESISTANCE—12 gauge multi-stranded COPPER wire results in extremely low cable resistance. Spade lugs plated with 50 micro inches gold for minimum contact resistance and minimum thermal EMF when using copper binding posts. (Less than $0.01 \mu\text{V}/^\circ\text{C}$).

TELLURIUM COPPER SPADE LUGS, SHIELDED LEAD

MODEL	LENGTH
1756-24	24"
1756-48	48"

MODEL 1756
(Specify Length)

NET 9.85

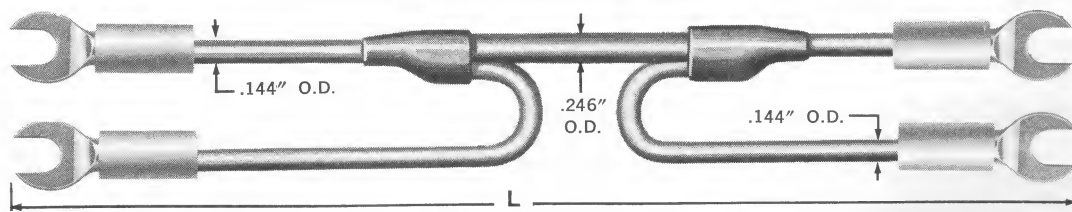


Designed for use with Kelvin Varley voltage dividers where extreme precision is required for low voltage measurements. Features guard shield to effectively reduce shunt resistance. Tough thermo-plastic molded to spade lug body. **COLORS:** Red, Black. Tellurium copper heavy duty one piece machined spade lug gold plated per MIL-G-45204, Type II, Class I. Conductor 12 AWG multi-stranded bare copper. Polyethylene primary insulation. Braided shield bare copper. Polyvinyl jacket, color black, per MIL-C-17C Type IIA.

MODEL	LENGTH	NET
1693-12	12"	2.50
1693-18	18"	2.50
1693-24	24"	2.50
1693-36	36"	2.50
1693-48	48"	2.55
1693-60	60"	2.60


MODEL 1693
(Specify Color)

TELLURIUM COPPER SPADE LUG JUMPER



Single conductor tellurium copper spade lug jumper used in applications where guard shield is not required. Tough thermo-plastic molded to spade lug body. Color matches wire. Tellurium Copper heavy duty one piece machined spade lug gold plated per MIL-G-45204, Type II, Class I. Conductor, 12 AWG multi-stranded bare copper. Insulation polyvinyl, 105°C, .144" O.D. **COLORS:** Black, Red, Green.

TEST PROBE TO BANANA JACK

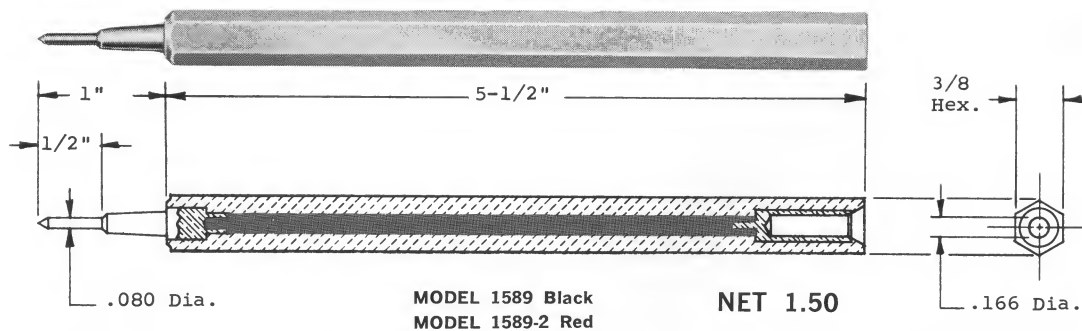


Banana jack in handle connected to tip. Permits use of standard banana plugs for circuit testing as a test prod. Heavy duty insulated handle molded to banana jack and tip.

PIN TIP: .080 dia. x 1/2" long, brass nickel plated.

BANANA JACK: .166 dia. Brass nickel plated. Accepts standard banana plug.

NEEDLE TIP PROBE TO BANANA JACK

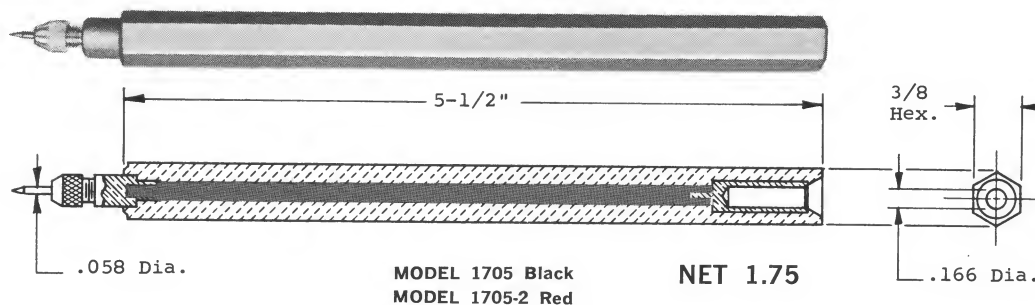


Sharp replaceable needle tip allows testing of encapsulated circuits. Banana jack in handle connected to tip. Permits use of standard banana plugs for circuit testing as a test prod. Heavy duty insulated handle molded to banana jack and tip.

PIN TIP: Replaceable needle tip, steel nickel plated.

BANANA JACK: .166 dia. Brass nickel plated. Accepts standard banana plug.

TEST PROBE TO BANANA PLUG

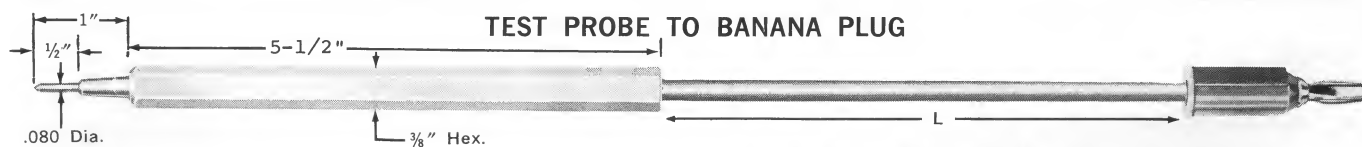

MODEL 1986-48-B	48" Long	Black	NET 1.75
MODEL 1986-48-R	48" Long	Red	NET 1.75

Insulated handle molded to probe tip and wire lead.


PROBE PIN TIP: .080 dia. x 1/2" long. Brass nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation, .144" O.D.

BANANA PLUG: Spring, one piece beryllium copper, heat treated, nickel plated. Tough thermo-plastic molded to body.

COLORS: Black, Red.

TEST PROBE TO PIN TIP

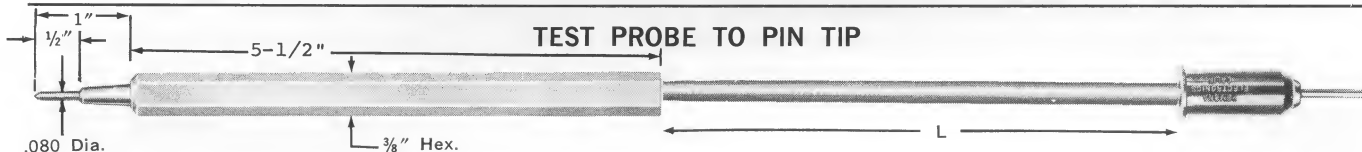

MODEL 1988-48-B	48" Long	Black	NET 1.75
MODEL 1988-48-R	48" Long	Red	NET 1.75

Insulated handle molded to probe tip and wire lead.


PROBE PIN TIP: .080 dia. x 1/2" long. Brass nickel plated.

WIRE: 18 AWG, Strand. 65 x 36 T.C. Extra flexible polyvinyl insulation .144" O.D.

PIN TIP: .080 dia. x 1/2" long. Brass nickel plated. Tough thermo-plastic molded to body.

COLORS: Black, Red.

TEST PROBE TO DOUBLE BANANA PLUG

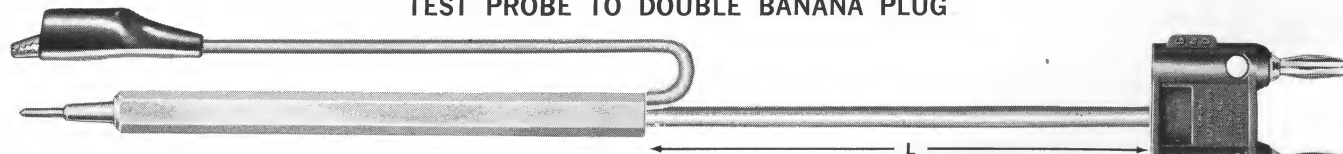

One piece molded construction. Insulated handle molded to probe tip and cable. Double banana plug molded to cable. Insulated minigator clip connected to shield lead.

PROBE PIN TIP: .080 dia. x 1/2" long. Brass nickel plated.

DOUBLE BANANA PLUG: On 3/4" centers. Spring, one piece beryllium copper, heat treated, nickel plated. Tough thermo-plastic molded to double plug body. Color, Gray.

CLIP: Minigator, steel, cad plated.

INSULATOR, VINYL: Color, Black.

CABLE: Shielded microphone cable: Polyethylene insulation. Vinyl jacket. Nom. capacity 25 pf./ft. .205" O.D. Color, Gray.

HANDLE: Color, red, molded of tough thermo-plastic.

MODEL 1569-B-4848" Long

NET 5.85

OTHER LENGTHS AVAILABLE TO ORDER

POMONA MOLDED DOUBLE BANANA PLUG PATCH CORDS AND TEST LEADS

... indispensable for bridge transformer connections, three terminal capacitor measurements and general hook-up for two wire systems. They are horizontally and vertically stackable in parallel.

Tough thermo-plastic material molded to plug body and cable insures maximum strength, moisture resistance and excellent insulative properties.


Used by leading industries in applications where extreme reliability is of prime importance.

FEATURES...

- One piece beryllium copper heat treated spring for maximum long life.
- Rounded spring design results in maximum contact area.
- GND., clearly molded on plug body and shell.
- Solder-bonded noise-free connections.

SPECIFICATIONS...

- Fits standard 0.166 dia. banana jacks, on 3/4" centers.
- Contact resistance less than 0.001 ohms per plug.
- Spring beryllium copper alloy 25 per QQ-C-533.
- Plug body brass per QQ-B-626, Comp. 22.
- Nickel plated per QQ-N-290, Class 2.

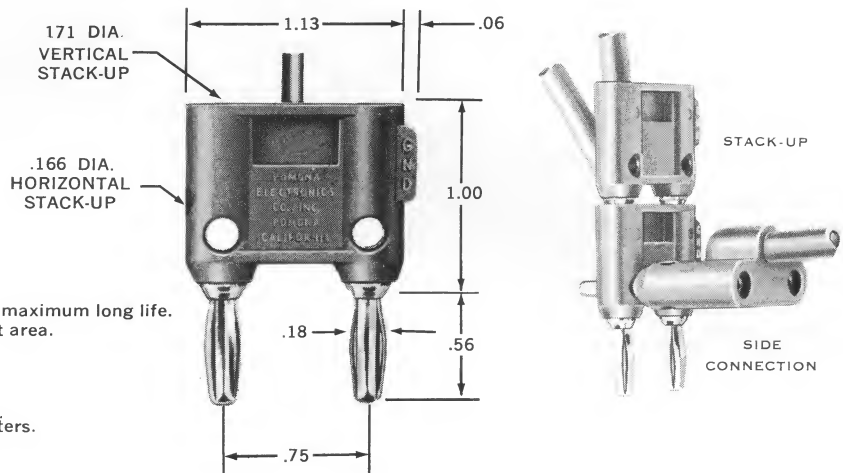

CABLE TYPE DESCRIPTION

TWO COND. TWISTED PAIR
18 AWG, Strand. 65 x 36 T.C.
Vinyl insulation. Vinyl jacket, .250"
O.D. Nom. Cap. 30 pf/ft.
COLOR: Gray.

SHIELDED MICROPHONE CABLE
Polyethylene insulation. Vinyl jacket,
.205" O.D. Nom. Cap. 25 pf/ft.
COLOR: Gray.

SHIELDED COAXIAL CABLE
RG58C/U Polyethylene insulation.
Vinyl jacket, .195" O.D.
Nom. Cap. 28.5 pf/ft. **COLOR: Black.**

DOUBLE PLUG BOTH ENDS*				
TWO COND. TWISTED PR.	SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
2BA-18	2BB-18	2BC-18	18"	4.85
2BA-24	2BB-24	2BC-24	24"	4.85
2BA-30	2BB-30	2BC-30	30"	4.85
2BA-36	2BB-36	2BC-36	36"	4.85
2BA-48	2BB-48	2BC-48	48"	5.00
2BA-60	2BB-60	2BC-60	60"	5.15

SHIELDED DOUBLE PLUG BOTH ENDS			
SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1550-B-18	1550-C-18	18"	5.85
1550-B-24	1550-C-24	24"	5.85
1550-B-30	1550-C-30	30"	5.85
1550-B-36	1550-C-36	36"	5.85
1550-B-48	1550-C-48	48"	6.00
1550-B-60	1550-C-60	60"	6.15

TWO COND. SHIELDED BALANCED LINE			
CABLE DESCRIPTION	MODEL	LENGTH	
2-Cond. shielded mic. cable. Polyethylene insulation. Vinyl jacket, .231" O.D. Nom. Cap. between cond. 18 pf/ft. Nom. Cap. between one cond. and remaining cond. connected to shield, 32 pf/ft. COLOR: Cable and double plug, Gray. Single ground plug, Green.	1167-18	18"	
	1167-24	24"	
	1167-30	30"	
	1167-36	36"	
	MODEL 1167		
	NET 7.85		


DOUBLE PLUG TO SINGLE BANANA PLUGS		
CABLE DESCRIPTION	MODEL	LENGTH
TWO COND. TWISTED PAIR	1368-18	18"
	1368-24	24"
	1368-30	30"
	1368-36	36"
	MODEL 1368	
	NET 5.85	

*NOTE: Molded double plug matches color of cable.

Two cond. Twisted pair, GRAY. Shielded mic. cable, GRAY.

Coaxial RG58C/U Cable, BLACK.

1. Other cable colors available to order on the Two Cond. Twisted Pair and Shielded Mic. cable models with plug to match.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.
2. Other lengths and cable types available to order.

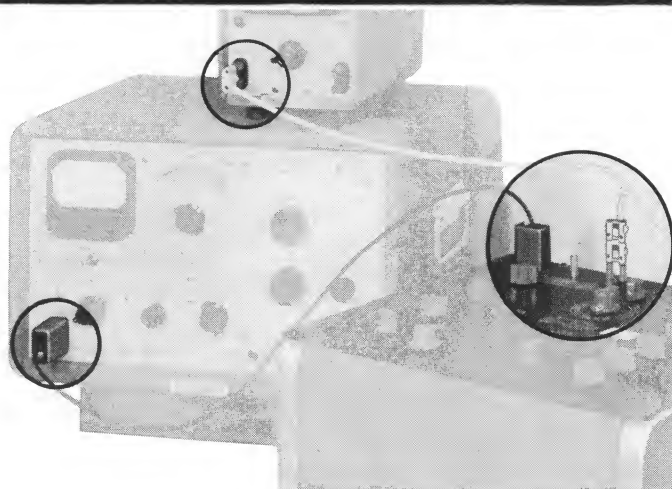


Standard video and RF connecting leads available in both shielded microphone and shielded coaxial cables. Designed to meet rigid industrial and military applications. Reliable solder-bonded connections minimize noise.

Pomona Electronics cable assemblies and patch cords are used in applications where extreme reliability is of prime importance.

NEW

CRIMP BNC MALE BOTH ENDS



CONN.: } Crimp Male BNC CABLE: Shielded Coax, RG58C/U CONN.: } Crimp Male BNC
1st END } (Comparable to UG88E/U) 2nd END } (Comparable to UG88E/U)

CABLE DESCRIPTION:	MODEL	LENGTH	NET
Shielded coax., RG58C/U, Polyethylene Insulation, Vinyl Jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.	2249-C-12	12"	3.85
	2249-C-24	24"	3.85
	2249-C-36	36"	3.85
	2249-C-48	48"	4.00
	2249-C-60	60"	4.15


CABLE TYPES

SHIELDED MICROPHONE CABLE Polyethylene insulation, Vinyl jacket, .205" O.D. Nom. Cap. 25 pf/ft. COLOR: Gray.

SHIELDED COAXIAL CABLE RG58C/U Polyethylene insulation, Vinyl jacket, .195" O.D. Nom. Cap. 28.5 pf/ft. COLOR: Black.

TWO COND. TWISTED PAIR 18 AWG, Strand. 65 x 36 T.C. vinyl insulation, vinyl jacket, .250" O.D. Nom. Cap. 30 pf/ft. Color: Gray.


BNC MALE BOTH ENDS



CONN.: } UG88E/U, CABLE: Shielded Mic. or CONN.: } UG88E/U,
1st END } Male BNC Shielded Coax, RG58C/U. 2nd END } Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
BNC-B-18	BNC-C-18	18"	5.85
BNC-B-24	BNC-C-24	24"	5.85
BNC-B-30	BNC-C-30	30"	5.85
BNC-B-36	BNC-C-36	36"	5.85
BNC-B-48	BNC-C-48	48"	6.00
BNC-B-60	BNC-C-60	60"	6.15


DOUBLE BANANA PLUG TO BNC MALE

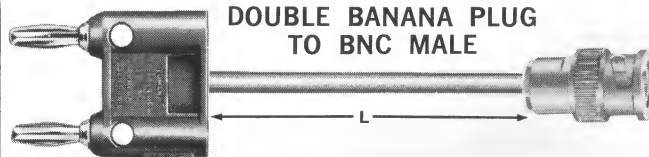

CONN.: } Double Banana Plug, CABLE: Shielded Mic. or CONN.: } UG88C/U,
1st END } on 3/4" Centers. Shielded Coax, RG58C/U. 2nd END } Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
2BB-BNC-18	2BC-BNC-18	18"	5.85
2BB-BNC-24	2BC-BNC-24	24"	5.85
2BB-BNC-30	2BC-BNC-30	30"	5.85
2BB-BNC-36	2BC-BNC-36	36"	5.85
2BB-BNC-48	2BC-BNC-48	48"	6.00
2BB-BNC-60	2BC-BNC-60	60"	6.15


RIGHT ANGLE BNC TO BNC MALE

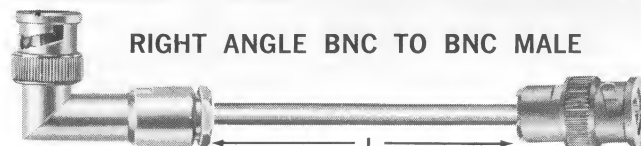

CONN.: } UG913A/U, CABLE: Shielded Mic. or CONN.: } UG88C/U,
1st END } Angle Male BNC Shielded Coax, RG58C/U. 2nd END } Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1383-B-18	1383-C-18	18"	7.85
1383-B-24	1383-C-24	24"	7.85
1383-B-30	1383-C-30	30"	7.85
1383-B-36	1383-C-36	36"	7.85


RIGHT ANGLE BNC MALE BOTH ENDS

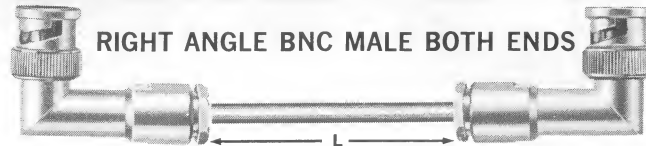

CONN.: } UG913A/U, CABLE: Shielded Mic. or CONN.: } UG913A/U,
1st END } Angle Male BNC Shielded Coax, RG58C/U. 2nd END } Angle Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1155-B-18	1155-C-18	18"	10.85
1155-B-24	1155-C-24	24"	10.85
1155-B-30	1155-C-30	30"	10.85
1155-B-36	1155-C-36	36"	10.85


UHF MALE TO BNC MALE



CONN.: } PL259, CABLE: Shielded Mic. or CONN.: } UG88C/U,
1st END } UHF Male Shielded Coax, RG58C/U. 2nd END } Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1367-B-18	1367-C-18	18"	5.85
1367-B-24	1367-C-24	24"	5.85
1367-B-30	1367-C-30	30"	5.85
1367-B-36	1367-C-36	36"	5.85

SHIELDED DOUBLE PLUG TO BNC MALE




CONN.: } Shielded Double plug, CABLE: Shielded Mic. or CONN.: } UG88C/U,
1st END } on 3/4" centers. Black anodized aluminum. Shielded Coax, RG58C/U. 2nd END } Male BNC

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH	NET
1555-B-18	1555-C-18	18"	6.85
1555-B-24	1555-C-24	24"	6.85
1555-B-30	1555-C-30	30"	6.85
1555-B-36	1555-C-36	36"	6.85

OTHER LENGTHS AND CABLE TYPES AVAILABLE TO ORDER

NEW


BNC MALE TO SINGLE BANANA PLUGS

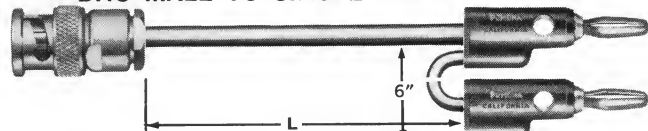

CONN: } UG88E/U 1st END } Male BNC	CABLE: Shielded Coax., RG58C/U	CONN: } Single Banana Plugs 2nd END } Color: 1 Black, 1 Red.	MODEL	LENGTH	NET
CABLE DESCRIPTION:					
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			2241-C-18	18"	5.85
			2241-C-24	24"	5.85
			2241-C-36	36"	5.85
			2241-C-48	48"	6.00

NEW


BNC MALE TO GR-874

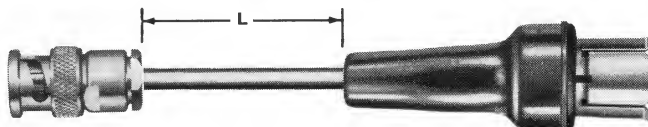

CONN: } UG88E/U 1st END } Male BNC	CABLE: Shielded Coax., RG58C/U	CONN: } GR-874 2nd END }	MODEL	LENGTH	NET
CABLE DESCRIPTION:					
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			1703-C-24	24"	9.85
			1703-C-36	36"	9.85
			1703-C-48	48"	10.00

NEW


BNC MALE TO SERIES "N" MALE

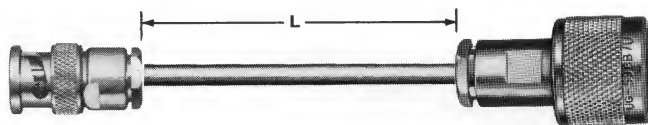

CONN: } UG88E/U 1st END } Male BNC	CABLE: Shielded coax., RG58C/U	CONN: } UG536B/U 2nd END } "N" Male	MODEL	LENGTH	NET
CABLE DESCRIPTION:					
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			1366-C-24	24"	6.85
			1366-C-36	36"	6.85
			1366-C-48	48"	7.00

NEW


BNC MALE TO BNC FEMALE



CONN: } UG88E/U 1st END } Male BNC	CABLE: Shielded coax., RG58C/U	CONN: } UG89C/U 2nd END } Female BNC	MODEL	LENGTH	NET
CABLE DESCRIPTION:					
Shielded Coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			2223-C-12	12"	6.85
			2223-C-24	24"	6.85
			2223-C-36	36"	6.85
			2223-C-48	48"	7.00
			2223-C-60	60"	7.15

NEW

BNC FEMALE BOTH ENDS




CONN: } UG89C/U 1st END } Female BNC	CABLE: Shielded Coax., RG58C/U	CONN: } UG89C/U 2nd END } Female BNC	MODEL	LENGTH	NET
CABLE DESCRIPTION:					
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			1808-C-12	12"	6.85
			1808-C-24	24"	6.85
			1808-C-36	36"	6.85
			1808-C-48	48"	7.00
			1808-C-60	60"	7.15

PATCH CORDS CONNECTING LEADS

NEW


TNC MALE BOTH ENDS



CONN: } Male TNC 1st END }	CABLE: Shielded coax., RG58C/U	CONN: } Male TNC 2nd END }	MODEL	LENGTH	NET
CABLE DESCRIPTION					
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			1944-C-12	12"	7.85
			1944-C-24	24"	7.85
			1944-C-36	36"	7.85
			1944-C-48	48"	8.00
			1944-C-60	60"	8.15

DOUBLE PLUG BALANCED LINE TO PJ-068


CONN: } Double and Single 1st END } Banana Plug	CABLE: 2 Cond. Shielded Microphone	CONN: } PJ-068 2nd END } Plug
--	---------------------------------------	----------------------------------

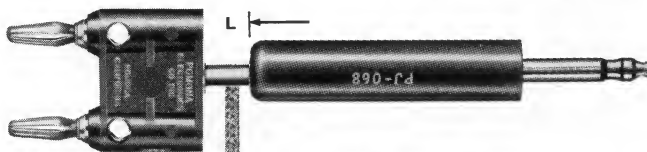

MODEL	LENGTH	NET
CABLE DESCRIPTION		
2 Cond. shielded microphone cable. Polyethylene insulation. Vinyl jacket, .231" O.D. Nom. Cap. between cond. 18 pf/ft. Nom. Cap. between one cond. and remaining cond. connected to shield, 32 pf/ft.		
COLORS: Cable and double plug, GRAY. Single ground plug, GREEN.		
2174-36	36"	9.85

NEW

DOUBLE PLUG TO GR-874

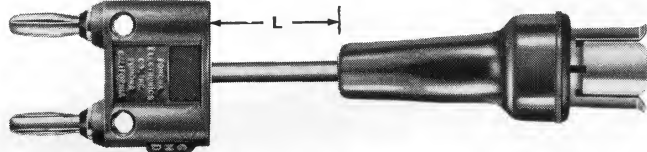


CONN: } Double Banana Plug, 1st END } on 3/4" Centers.	CABLE: Shielded Coax., RG58C/U	CONN: } GR-874 2nd END }	MODEL	LENGTH	NET
CABLE DESCRIPTION					
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			2243-C-24	24"	9.50
			2243-C-36	36"	9.50
			2243-C-48	48"	9.65

COLOR: Cable and double plug, Black.

NEW

DOUBLE PLUG TO SINGLE PIN TIPS

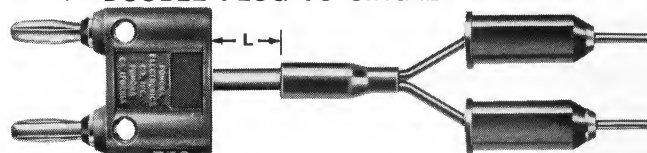


CONN: } Double Banana 1st END } Plug, on 3/4" Centers.	CABLE: Two Cond. Twisted Pair	CONN: } Single Pin Tip 2nd END } Plugs, .080 Dia. Color: 1 Black, 1 Red	MODEL	LENGTH	NET
CABLE DESCRIPTION					
Two Cond. Twisted pair, 18 AWG, Strand. 65 x 36 T.C. Vinyl insulation, vinyl jacket, .250" O.D. Nom. Cap. 30 pf/ft.					
			2184-A-24	24"	4.85
			2184-A-36	36"	4.85
			2184-A-48	48"	5.00

COLOR: Cable and Double plug, Gray.

NEW

DOUBLE PLUG TO STACK-UP PIN TIPS

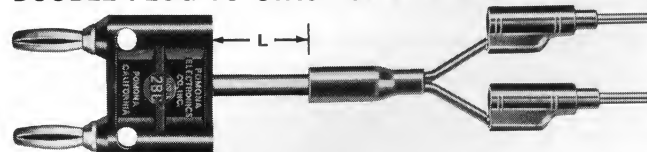


CONN: } Double Banana 1st END } Plug, on 3/4" Centers.	CABLE: Shielded Coax., RG58C/U	CONN: } Single Stack-Up 2nd END } Pin Tip Plugs, .080 Dia. Color: 1 Black, 1 Red.	MODEL	LENGTH	NET
CABLE DESCRIPTION					
Shielded coax., RG58C/U, Polyethylene insulation. Vinyl jacket, .195" O.D., Nom. Cap. 28.5 pf/ft.					
			28BC-PP-18	18"	7.50
			28BC-PP-24	24"	7.50
			28BC-PP-36	36"	7.50
			28BC-PP-48	48"	7.65

COLOR: Cable and Double Plug, Black.

OTHER LENGTHS AVAILABLE TO ORDER

ALLIGATOR CLIPS TO BNC MALE

NET 5.85

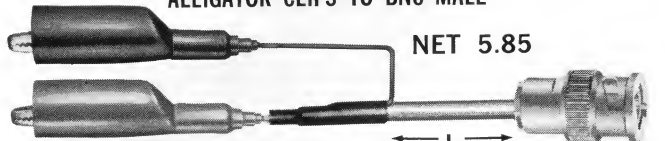

CONN.: } Alligator Clips, Steel, cad plated.
1ST END } Insulators, Vinyl: Black/Red.


CABLE: Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } UG88C/U.
2ND END } BNC, Male.

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
AL-B-BNC-18	AL-C-BNC-18	18"
AL-B-BNC-24	AL-C-BNC-24	24"
AL-B-BNC-30	AL-C-BNC-30	30"
AL-B-BNC-36	AL-C-BNC-36	36"

MINIGATOR CLIPS TO BNC MALE

NET 5.85

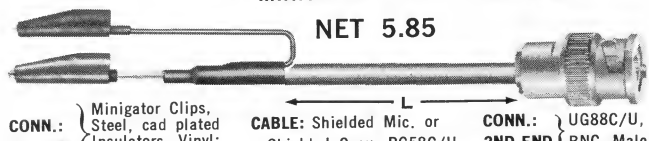

CONN.: } Minigator Clips, Steel, cad plated.
1ST END } Insulators, Vinyl: Black/Red.


CABLE: Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } UG88C/U.
2ND END } BNC, Male.

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
MG-B-BNC-18	MG-C-BNC-18	18"
MG-B-BNC-24	MG-C-BNC-24	24"
MG-B-BNC-30	MG-C-BNC-30	30"
MG-B-BNC-36	MG-C-BNC-36	36"

ALLIGATOR CLIPS TO DOUBLE BANANA PLUG*

NET 5.85

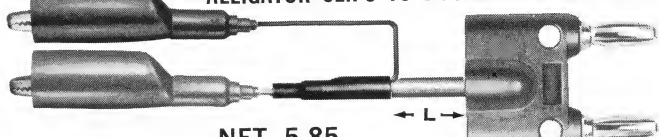

CONN.: } Alligator Clips, Steel, cad plated.
1ST END } Insulators, Vinyl: Black/Red.


CABLE: Two Cond. Twisted Pair, Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } Double Banana Plug, on 3/4" centers.

TWO COND. TWISTED PAIR	SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
2BA-AL-18	2BB-AL-18	2BC-AL-18	18"
2BA-AL-24	2BB-AL-24	2BC-AL-24	24"
2BA-AL-30	2BB-AL-30	2BC-AL-30	30"
2BA-AL-36	2BB-AL-36	2BC-AL-36	36"

MINIGATOR CLIPS TO DOUBLE BANANA PLUG*

NET 5.85

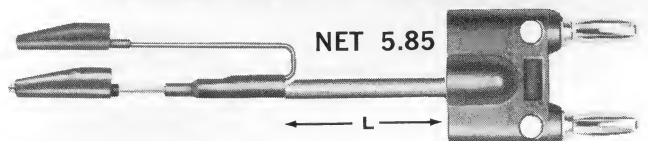

CONN.: } Minigator Clips, Steel, cad plated.
1ST END } Insulators, Vinyl: Black/Red.


CABLE: Two Cond. Twisted pair, Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } Double Banana Plug, on 3/4" centers.

TWO COND. TWISTED PAIR	SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
2BA-MG-18	2BB-MG-18	2BC-MG-18	18"
2BA-MG-24	2BB-MG-24	2BC-MG-24	24"
2BA-MG-30	2BB-MG-30	2BC-MG-30	30"
2BA-MG-36	2BB-MG-36	2BC-MG-36	36"

SERIES "N" MALE BOTH ENDS

NET 10.85

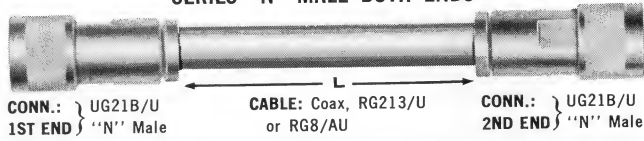

CONN.: } UG21B/U
1ST END } "N" Male


CABLE: Coax, RG213/U or RG8/AU

CONN.: } UG21B/U
2ND END } "N" Male

CABLE DESCRIPTION	MODEL	LENGTH
Shielded Coax. Polyethylene Insulation. Vinyl jacket, Black. Nom. Cap. 29.5 pf/ft. Nom. Imp. 52 ohms. Nom. O.D. .405"	1658-18	18"
	1658-24	24"
	1658-30	30"
	1658-36	36"

UHF MALE BOTH ENDS

NET 5.85

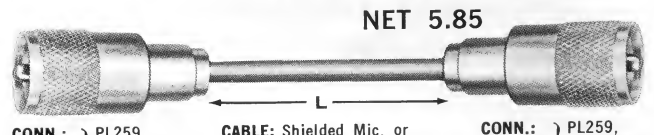

CONN.: } PL259,
1ST END } UHF, Male


CABLE: Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } PL259,
2ND END } UHF, Male

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
UHF-B-18	UHF-C-18	18"
UHF-B-24	UHF-C-24	24"
UHF-B-30	UHF-C-30	30"
UHF-B-36	UHF-C-36	36"

ALLIGATOR CLIPS TO UHF MALE

NET 5.85

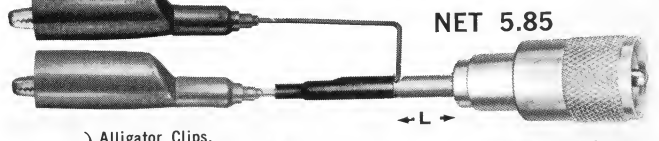

CONN.: } Alligator Clips, Steel, cad plated.
1ST END } Insulators, Vinyl: Black/Red.


CABLE: Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } PL259,
2ND END } UHF, Male

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
AL-B-UHF-18	AL-C-UHF-18	18"
AL-B-UHF-24	AL-C-UHF-24	24"
AL-B-UHF-30	AL-C-UHF-30	30"
AL-B-UHF-36	AL-C-UHF-36	36"

MINIGATOR CLIPS TO UHF MALE

NET 5.85

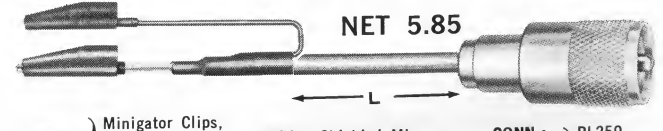

CONN.: } Minigator Clips, Steel, cad plated.
1ST END } Insulators, Vinyl: Black/Red.


CABLE: Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } PL259,
2ND END } UHF, Male

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
MG-B-UHF-18	MG-C-UHF-18	18"
MG-B-UHF-24	MG-C-UHF-24	24"
MG-B-UHF-30	MG-C-UHF-30	30"
MG-B-UHF-36	MG-C-UHF-36	36"

UHF MALE TO DOUBLE BANANA PLUG*

NET 5.85

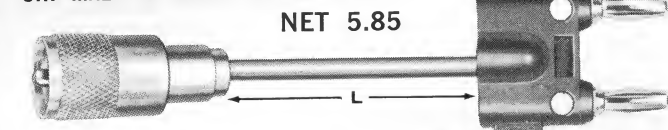

CONN.: } PL259
1ST END } UHF, Male


CABLE: Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } Double Banana Plug, on 3/4" centers.

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
2BB-UHF-18	2BC-UHF-18	18"
2BB-UHF-24	2BC-UHF-24	24"
2BB-UHF-30	2BC-UHF-30	30"
2BB-UHF-36	2BC-UHF-36	36"

UHF MALE TO SHIELDED DOUBLE PLUG*

NET 6.85

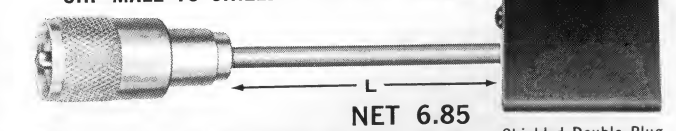

CONN.: } PL259,
1ST END } Male, UHF


CABLE: Shielded Mic. or Shielded Coax, RG58C/U.

CONN.: } Shielded Double Plug, on 3/4" centers. Black anodized aluminum.

SHIELDED MIC. CABLE	SHIELDED COAX. CABLE	LENGTH
1556-B-18	1556-C-18	18"
1556-B-24	1556-C-24	24"
1556-B-30	1556-C-30	30"
1556-B-36	1556-C-36	36"

*NOTE: Molded double plug matches color of cable.
Two cond. Twisted pair, GRAY. Shielded mic. cable, GRAY.
Coaxial RG58C/U cable, BLACK.

- Other CABLE COLORS available to order on the Two Cond. Twisted Pair and Shielded Mic. cable models, with plug to match.
COLORS: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray, White.
- Other lengths and cable types available to order.

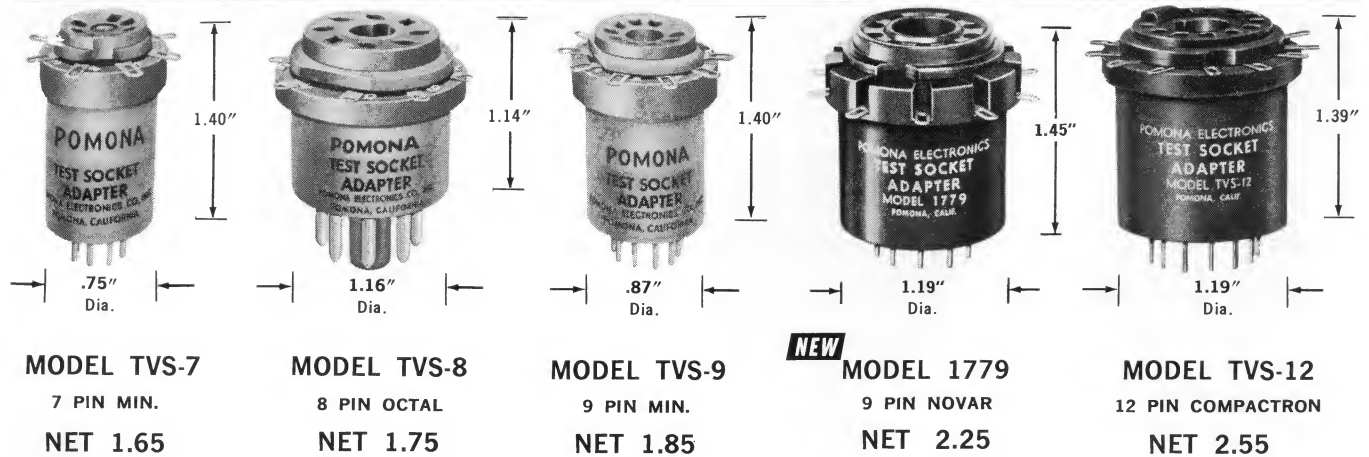

Pomona Test Socket Tube Adapters are ideal for making measurements of voltage, resistance, audio and video without tracing complicated circuits from the bottom of the chassis. They feature: Extended test tabs for easy use with either alligator clips or test prods; Low loss MICA-FILLED molded phenolic construction per MIL-M-14, MFE. Power factor less than 0.010

at 10 Mc; high insulation resistance, the I.R. exceeds 500,000 megohms at 40% R.H., at 24°C; Distributed capacity, inter-element approximately 1 micro-micro farad; high voltage operation, voltage breakdown elements exceeds 1700 volts AC or DC Model TVS-12 and 1779 molded of electrical grade Black phenolic.

TVS-789 KIT SET OF THREE 5.25 (TVS-7, TVS-8, TVS-9)

TUNER TV TEST SOCKET TUBE ADAPTERS


FOR USE WITH TUNERS HAVING
CAPTIVE OR TELESCOPING
TUBE SHIELDS

IT'S TALL • IT'S SLIM • IT FITS

- Extra height—exact fit—clears shields
- Ready access to socket connections
- Exposed operation saves time

A MUST for every modern TV
Service Shop


The 7-, 9- or 10-HIGH adapter rises above the shields and places testing in the open. Shields or tuner covers do not have to be removed. All construction is the highest quality. Interelement distributed capacity is approximately 1.5 micro-micro farad. Voltage breakdown elements exceed 1800 V. AC or DC. The insulation resistance exceeds 5×10^5 megohms at 40% R.H. at 24°C.

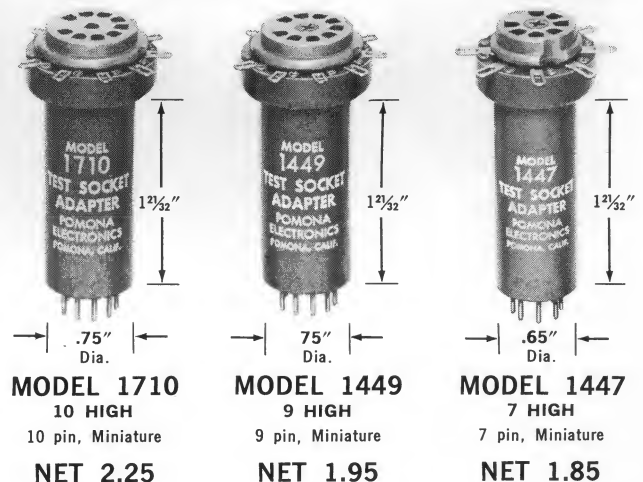

SURFACE MOUNTED BREADBOARD SOCKETS IDEAL FOR ELECTRONIC AND EXPERIMENTAL USE


Surface Mounted Breadboard Sockets are used for experimental circuit design, portable and enclosed units, plug-in and packaged assemblies. They feature: An insulated base to prevent connections from shorting to chassis; Eliminates double chassis design; Circuits may be wired in an enclosed unit; The base connections are numbered for easy identification;

Grade-A phosphor bronze spring contacts; Standard center to center mounting holes; For ease of installation the 7 and 9 Pin Miniatures may be mounted either in the center or on the sides, the 8 Pin Octal is mounted on the sides; Small mounting holes permit the re-use of experimental chassis.

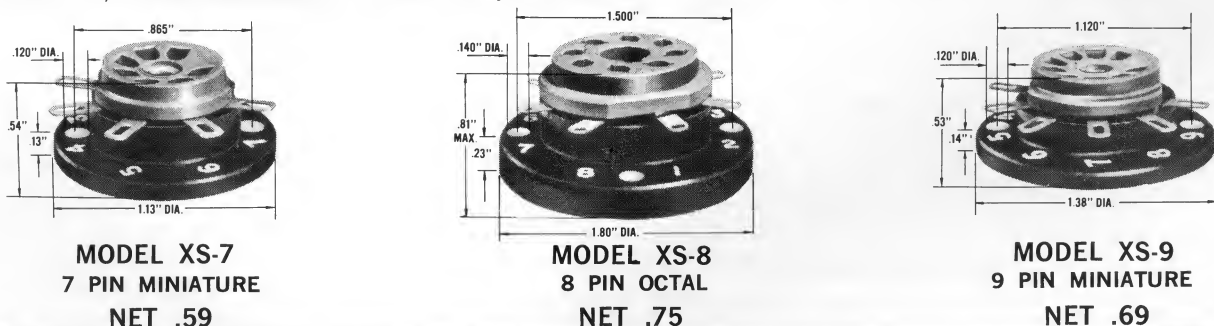

The Socket Saver® is designed to be installed on tube checkers and other electronic equipment to prevent wear and tear of sockets on original equipment. They are easy to install and remove. This eliminates the necessity

of replacing and rewiring sockets on original equipment. Built of quality materials. BERYLLIUM COPPER LONG LIFE CONTACTS to give maximum service.

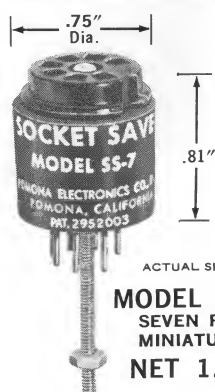


ACTUAL SIZE
MODEL SS-7
SEVEN PIN
MINIATURE
NET 1.75

U.S. PAT.
NO. 2952003




ACTUAL SIZE
MODEL SS-8
EIGHT PIN
OCTAL
NET 1.75

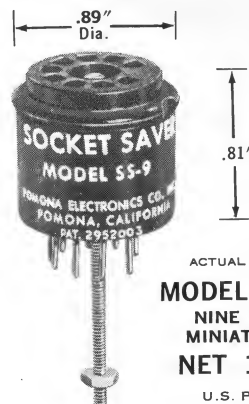


ACTUAL SIZE
MODEL SS-9
NINE PIN
MINIATURE
NET 1.75

U.S. PAT.
NO. 2952003


MODEL SS-789 KIT SET OF THREE 5.25 (SS-7, SS-8, SS-9)

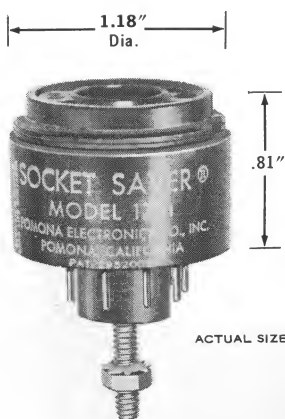

ACTUAL SIZE
MODEL 1751
9 PIN
NOVAR
NET 1.95

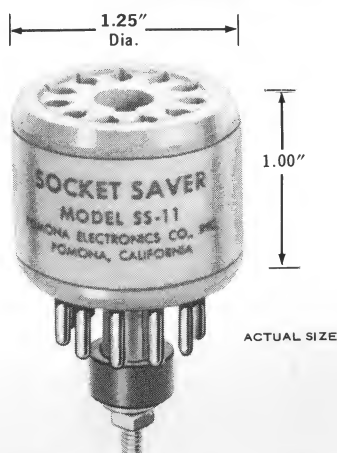


ACTUAL SIZE
MODEL SS-11
11 PIN
OCTAL STYLE
NET 1.95

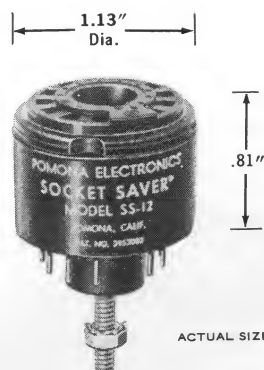


ACTUAL SIZE
MODEL SS-12
12 PIN
COMPACTRON
NET 2.25

MINIATURIZED SOCKET SAVERS®


For use in applications where vertical height is restricted. Contacts made of beryllium copper, heat treated. Models 1847 and 1849 closed entry receptacles, contact and pin one piece formed beryllium copper, molded of black phenolic electrical grade.



ACTUAL SIZE
MODEL 1847
7 PIN MINIATURE
NET 1.95

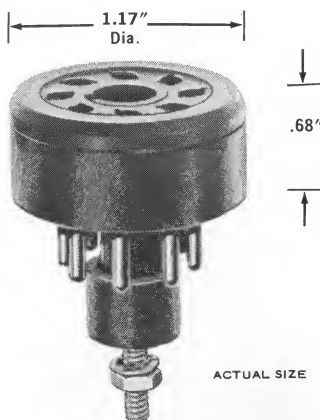


ACTUAL SIZE
MODEL 1848
8 PIN OCTAL
NET 1.95



ACTUAL SIZE
MODEL 1849
9 PIN MINIATURE
NET 1.95

■ POMONA Test Socket Adapters are ideal for making measurements of voltage, resistance, and video from the base of the picture tube. The test socket adapter is inserted between the CR Tube base and its socket.


This completes the circuit and makes all connections readily accessible. Measurements can be made without tracing circuit wiring to test points below the chassis, thereby saving valuable time and increasing efficiency in trouble shooting.



MODEL TVS-1

DUO DECAL
For Television
picture tubes


NET 1.95



MODEL TVS-2

NEO-DIHEPTAL
For color Television
picture tubes


NET 7.45



MODEL TVS-3

EIGHTAR (.040 PINS)
For 110° Television
picture tubes

NET 2.55



MODEL TVS-4

7 PIN (.093 PINS)
For 110° Television
picture tubes

NET 1.95

TUBE SOCKET CONVERSION ADAPTERS

110° CRT SOCKET ADAPTER TO DUO DECAL BASE.

FOR TESTING NEW NARROW-NECK 110° TUBES.

MODEL 110-E

Similar to 110-G, except 8KP Basing, tests 23EP4 etc.

NET 1.55

Modernize your present test equipment with these simple adapters. Just plug in adapter to convert to 110° socket. Used for testing, ageing, and lifetesting, etc.



MODEL 110-G

Eightar socket end, 8JS Basing, accepts pins with .040 dia., (.600 pin circle dia.). Wired to test 110° series similar to 17DLP4, 21ESP4, 23KP4, etc. Plug end wired to Duo Decal 12L Basing.

NET 1.55



MODEL 110-P

Eightar socket end, 8JK Basing, accepts pins with .040 dia., (.600 pin circle dia.). Wired to test 110° Semi-Flat S-F series 17DAP4/SF17, 21EAP4/SF21, etc. Plug end wired to Duo Decal 12L Basing.


NET 1.55



MODEL 110-R

Eightar socket end, 8HR Basing, accepts pins with .040 dia., (.600 pin circle dia.). Wired to test 110° series similar to 17BZP4, 21CEP4, 23CP4, etc. Plug end wired to Duo Decal 12L Basing.

NET 1.55



MODEL 110-S

Socket end, button base, 7FA Basing, accepts 7 pins .093 dia., (.820 pin circle dia.). Wired to test 110° series similar to 17BVP4, 21CSP4, 23JP4, etc. Plug end wired to Duo Decal 12L Basing.

NET 1.55




MODEL 110-RS

Eightar socket end, 8HR Basing, accept pins with .040 dia., (.600 pin circle dia.). Wired to test 110° series similar to 17BZP4, 21CEP4, 23CP4, etc. Plug end, 7 pin Button, 7FA Basing.

NET 1.95

NEW

SYLVANIA TO RCA 110° CRT—ADAPTER



Socket End: Sylvania Type 7FA Basing.
Plug End: RCA Type BHR Basing.


MODEL 110-SYR NET 2.25

Universal Harness


TESTING ADAPTER


Takes the Trouble out of Trouble Shooting!

TEST SOCKET: Extended test tabs, phosphor bronze contacts, heavy duty molded phenolic base with easy-to-read socket connections. **CURRENT MEASUREMENT CONNECTIONS:** Fully insulated, molded .080 phone tip plugs. **INSULATED PLUG:** Fits either shielded or unshielded tube sockets. Send for detailed literature and operating instructions.

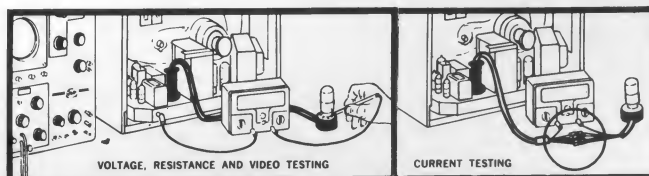

Model 1737 (7 Pin) Model 1738 (8 Pin) Model 1739 (9 Pin) **NET 9.95 EACH**

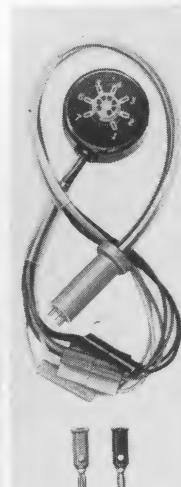

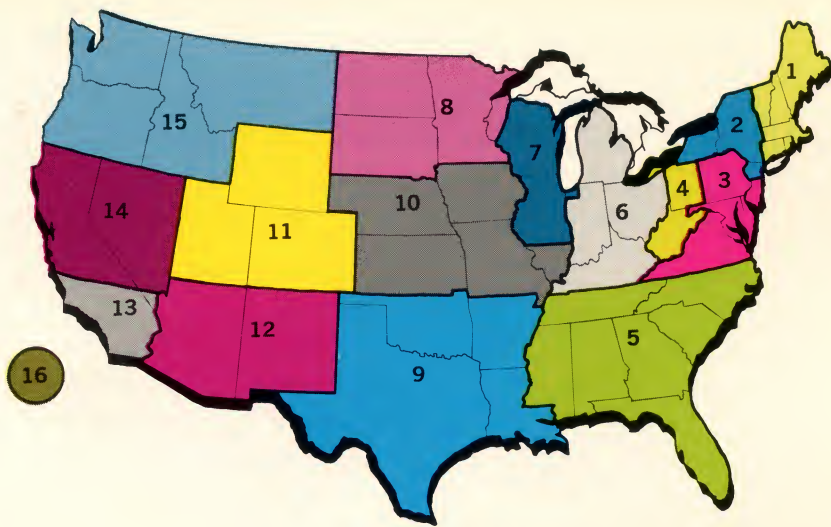

SALES REPRESENTATIVES

Listed below are the names of our Factory Representatives who have contributed greatly to the growth of our organization. The men in your area are always ready to confer with you and assist you regarding Pomona Electronics products.

1 Robert S. Reiss Assoc.

70 Jessie Drive
West Haven, Connecticut
(203) WEst 3-8542

Territory: Maine, Vermont, New Hampshire, Massachusetts, Connecticut, Rhode Island

Robert S. Reiss Assoc.
(Branch Office)

Al Appell
199 East Foxboro Street
Sharon, Massachusetts
(617) SUNset 4-3439

2 Jack Weber

165 West End Avenue
New York, New York
(212) TR 3-1484

Territory: State of New York, Northern New Jersey

3 David S. Linz

238 Shelmire Street
Philadelphia 11, Pennsylvania
(215) ESsex 9-0734

Territory: Eastern Pennsylvania, Southern New Jersey, Maryland, Delaware, Washington, D.C., and surrounding area in Virginia

4 F. P. Yarussi Co.

312 Rockfield Road
Pittsburgh, Pennsylvania 15216
(412) CAanal 1-4676

Territory: Western Pa., West Va.

5 V. Avis McCorvey Co.

2469 North Decatur Road
P. O. Box 606
Decatur, Georgia
(404) 626-2502

Territory: Alabama, Florida, Georgia, Mississippi, North and South Carolina, Tennessee

V. Avis McCorvey Co. (Branch Office)

Frank Alexander
2248 Third Street, N.W.
Birmingham 15, Alabama
(205) VERNon 6-5769

V. Avis McCorvey Co. (Branch Office)

James D. Burnett
P. O. Box 128
Lutz, Florida
(813) 949-1479

6 Perry Lohse & Co.

529 Richmond Road
Cleveland 24, Ohio
(216) 381-7788

Territory: Ohio, Michigan, Kentucky and Indiana (except counties of Lake, Porter and La Porte)

Perry Lohse & Co. (Branch Office)

Snip & Anderson Associates
1060 Blanchard SW
Grand Rapids, Mich. 49509
Territory: Michigan, N.W. Ohio

Perry Lohse & Co. (Branch Office)

Ed Howell
3443 North DeQuincy Street
Indianapolis, Indiana 46218
(317) LI 6-5228
Territory: Indiana, Kentucky, S.W. Ohio

7 William M. Linz Associates, Inc.

6328 North Cicero Avenue
Chicago 46, Illinois
(312) MULberry 5-6060

Territory: Illinois—south to and including Jacksonville, Springfield, Decatur, Moline and Rock Island. Wisconsin—north to Green Bay and Marinette. Counties of Lake, La Porte and Porter in Indiana

8 Northern States Sales Co.

1421 Park Avenue
Minneapolis 4, Minnesota
(612) 333-2431

Territory: North and South Dakota, Minnesota, Northwestern Wisconsin—including cities of La Crosse, Eau Claire, Chippewa Falls, Ashland

9 Techno Associates

P. O. Box 20544
Dallas, Texas 75220
(214) FLEetwood 7-9213

Territory: Arkansas, Louisiana, Oklahoma, Texas—except City of El Paso

10 Clemenson-Larrabee Co.

4034 Broadway
Kansas City 11, Missouri
(816) WESTport 1-0657

Territory: Missouri, Kansas, Iowa, Nebraska, and cities of Belleville and Benton in Illinois

Clemenson-Larrabee Co. (Branch Office)

Berk Fontaine
2725 Beloit Drive
Bridgeton, Missouri
(314) PE 9-6857

11 AES, Inc.

1559 Chester Street
Aurora, Colorado
(303) EMpire 6-0208

Territory: Colorado, Utah, Wyoming

12 Harry A. Moore Sales Co.

P. O. Box 7245
4142 North 18th Street
Phoenix, Arizona
(602) CREstwood 4-0060

Territory: Arizona, New Mexico, El Paso, Texas

13 Paul Nurches—Indus.-OEM Sales

2396 East Foothill Blvd.
Pasadena, California
(213) MURray 1-8957

Territory: Southern California, Southern Nevada and City of Las Vegas

Al J. Rissi Sales Co. (Distributor Sales)

1017 East Las Tunas Drive
San Gabriel, California 91776
(213) ATLantic 6-1476

Territory: Southern California, Southern Nevada and City of Las Vegas

14 Paul Nurches—Indus.-OEM Sales (Branch Office)

Chuck Boyenga
941 Charleston Road
Palo Alto, California
(415) DA 6-7842

Territory: Northern California, Nevada—except City of Las Vegas and southern tip

Belchamber & French Co. (Distributor Sales)

3944 El Camino Real
Palo Alto, California
(415) DA 1-6953

Territory: Northern California, Nevada—except City of Las Vegas and southern tip

15 Fred H. Haight Co.

3212 Eastlake Avenue
Seattle, Washington
(206) EASt 2-1818

Territory: Oregon, Washington, Idaho, Montana, Alaska, Vancouver, British Columbia, Victoria

16 Intercontinental Aviation Services, Inc.

P. O. Box 1705
608 North Bedford Drive
Beverly Hills, California
(213) CREstview 4-7578

Territory: Export

POMONA Electronics CO., INC.

1500 EAST NINTH ST. • POMONA, CALIFORNIA
TELEPHONE: AREA CODE 714-623-3463

